

HPP

Level Probes with plastic housing

Probes may be used in upright or hanging orientation. Protection class IP 65 / IP 68

- Connection cable with the length of 3m or as required
- 1 - 3 electrodes
- Easy adjustable switching points
- All parts which may touch the medium are made from physiologically harmless materials
- For conductive filling level acquisition



Technical data

Mounting orientation: Downwards hanging or upright standing




Probe-head material: PPH

Media temperature: max. 90°C

Electrode material: V4A / 1.4571
(optional HAC-C4; Titanium)

Type	Electrodes	Orientation	Cable	Housing	Moduled	Submersible	Hysteresis
HPP-1V.1	1	hanging	–	Ø 20mm	–	✓	–
HPP-1V.2	1	hanging	✓	Ø 20mm	–	✓	–
HPP-2V.1	2	standing	–	Ø 30mm	–	–	–
HPP-2V.2	2	hanging	✓	Ø 30mm	✓	✓	–
HPP-3V.2	3	hanging	✓	Ø 30mm	✓	✓	10mm o.A.

Dimensions

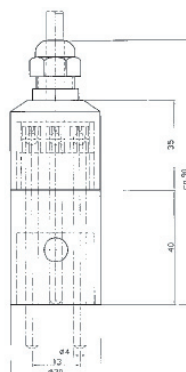

Accessories

Holding fixture for hanging probe:

Adjustment of height and fixation through mounting thread

Art.Nr. **HSH-PP4i**

For max. 4 hanging probes



Art.Nr. **MP 73**

For 1 hanging probe

