

## GPP

### Version 2 – Level Probe in plastic housing

Electric interface through a factory mounted cord with numbered wires. Case moduled. Protection class IP 68.

- Connection cable with the length of 3m or as required
- Elektrode lenth available 5 to 4000mm (please specify with your order)
- 1 - 7 elektrodas
- All parts which may touch the medium are made from physiologically harmless materials
- For conductive filling level acquisition



### Technical data


**Mounting method:** Thread  
**Mounting orientation:** any  
**Media temperature:** max. 90°C  
**Media pressure:** max. 10 bar (+60°C)

**Probe-head material:** PPH  
**Electrode material:** V4A / 1.4571 (optional HAC-C4; Titanium)  
**Coating:** Polyolifin (optional Kynar)  
**Sealing ring:** NBR 70

Size	Electrodes	Standard-Model
1/2"	1	GPPE - 1VP2
1/2"	2	GPPE - 2VP2
3/4"	2	GPPF - 2VP2
3/4"	3	GPPF - 3VP2
1"	1	GPPG - 1VP2
1"	2	GPPG - 2VP2
1"	3	GPPG - 3VP2

Size	Electrodes	Standard-Model
1"	4	GPPG - 4VP2
1 1/2"	2	GPPI - 2VP2
1 1/2"	3	GPPI - 3VP2
1 1/2"	4	GPPI - 4VP2
1 1/2"	5	GPPI - 5VP2
1 1/2"	6	GPPI - 6VP2
1 1/2"	7	GPPI - 7VP2

### Dimensions

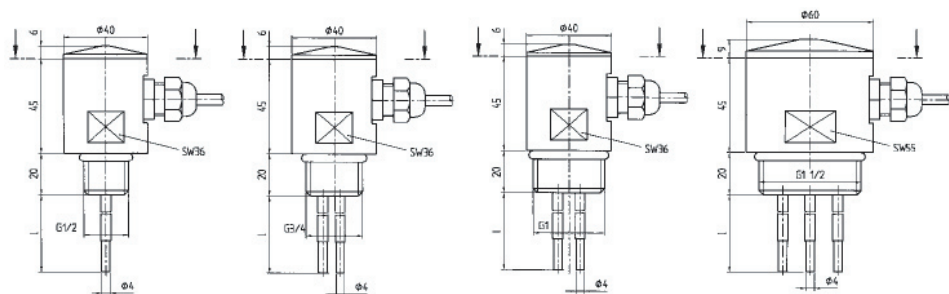

### Options

**Distance fastener** Material PPH  
**Lock-nut** Material PPH  
**Mounting bracket** Material V2A / 1.4301