

GPP

Version 4 – Level Probe in plastic housing

Electric interface through a lateral mounted connector and appropriate plug. Case moduled. Protection class IP 67/68.

- Panel Connector
- Elektrode lenth available 5 to 4000mm (please specify with your order)
- 1 - 7 elektrodes
- All parts which may touch the medium are made from physiologically harmless materials
- For conductive filling level acquisition



Technical data


Mounting method: Thread
Mounting orientation: any
Media temperature: max. 90°C
Media pressure: max. 10 bar (+60°C)

Probe-head material: PPH
Electrode material: V4A / 1.4571 (optional HAC-C4; Titanium)
Coating: Polyolifin (optional Kynar)
Sealing ring: NBR 70

Size	Electrodes	Standard-Model
1/2"	2	GPPE - 2VP4
3/4"	2	GPPF - 2VP4
3/4"	3	GPPF - 2VP4
1"	2	GPPG - 2VP4
1"	3	GPPG - 3VP4
1"	4	GPPG - 4VP4

Size	Electrodes	Standard-Model
1 1/2"	2	GPPI - 2VP4
1 1/2"	3	GPPI - 3VP4
1 1/2"	4	GPPI - 4VP4
1 1/2"	5	GPPI - 5VP4
1 1/2"	6	GPPI - 6VP4
1 1/2"	7	GPPI - 7VP4

Dimensions

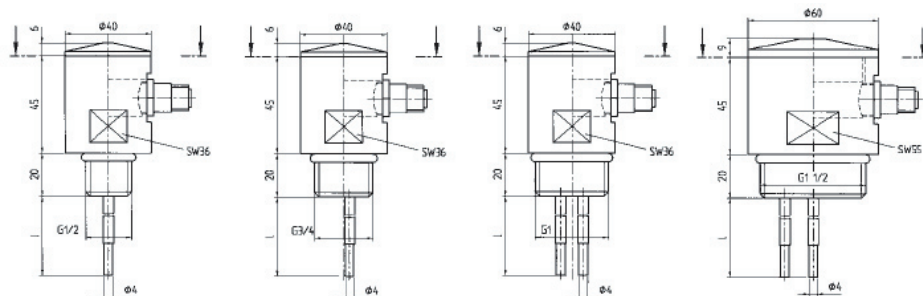

Options

Distance fastener Material PPH
Lock-nut Material PPH
Mounting bracket Material V2A / 1.4301

Note

The interface plug ist **not** part of shipment.