

GVA

Version 3 – Level Probe with stainless steel housing

Electric interface through a top mounted valve connector according DIN 43650. Case moduled. Protection class IP 65.

- Connector base for DIN 43650
- Electrode length available 5 to 4000mm (please specify with your order)
- 2 - 3 electrodes
- For heavy-duty
- All parts which may touch the medium are made from physiologically harmless materials (with Polyolefin coating)
- For conductive filling level acquisition




Technical data

Mounting method:	Thread	Probe-head material:	V2A / 1.4305 Cover and Cable gland brass, nickel-plated
Mounting orientation:	any	Electrode material:	V4A / 1.4571 (optional HAC-C4; Titanium)
Case temperature:	max. +110°C	Coating:	Kynar (optional Polyolifin)
Media temperature:	max. +120°C (Polyolefin max. 100°C)	Sealing ring:	FPM
Media pressure:	max. 10 bar		

Size	Electrodes	Standard-Model
1"	2	GVAG - 2VK3
1"	2	GVAG - 2VK3R
1"	3	GVAG - 3VK3

⚠ To order the Polyolifin-coated version insert „P” instead of „K” – e.g. „GVAE - 1VP1”.

Dimensions

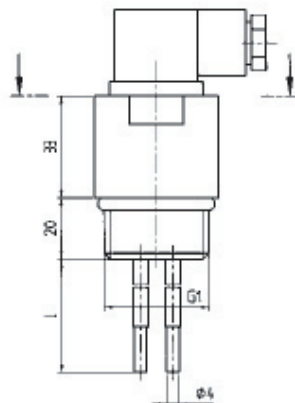

Options

Mounting bracket	Material V2A / 1.4301
Junction cable	with numeric labeled wires