





## cablequick® FDA Type 100 (100x145 mm)



### Product information

Efficient connection technology for terminal boxes, control cabinets for tool-free introduction of actuators, sensors, measuring and control instrumentation, optoelectronic, pneumatic cables and drive technology into a control panel. KDPs of the product group 100 fits into standard cut-outs for Rittal and Sarel cabinets when combined with adapter plates. These adapter plates can be configured individually.

The FDA stainless steel version is particularly suitable for use in the food and pharmaceutical sectors. Integrated threaded bolts mean that no screws are visible from outside. Mounting set included in delivery.

- V4A : 1.4571
- FDA compliant


### Information, conformities and approvals



Article	Order No.	Color	No. Openings	Openings No. Ø mm	PU pcs.
	87663963	Grinded	15	3x 8 mm - 12 mm 12x 11 mm - 16 mm	1
FDA cablequick® KDP 100/18, V4A	87663958	Grinded	18	18x 8 mm - 12 mm	1
FDA cablequick® KDP 100/24, V4A	87663957	Grinded	24	24x 6 mm - 10.5 mm	1
FDA cablequick® KDP 100/30, V4A	87663950	Grinded	30	12x 3.5 mm - 6.2 mm 12x 6 mm - 10 mm 6x 9 mm - 14 mm	1
cablequick® KDP 100/30B, V4A FDA	87663962	Grinded	30	12x 3.5 mm - 6.2 mm 12x 6° - 10° 4x 9° - 14° 2x 12° - 18°	1
FDA cablequick® KDP 100/40, V4A	87663956	Grinded	40	40x 4.5 mm - 8.5 mm	1
FDA cablequick® KDP 100/56, V4A	87663953	Grinded	56	48x 3.5 mm - 6.2 mm 8x 6° - 10°	1



## cablequick® FDA Type 100 (100x145 mm)

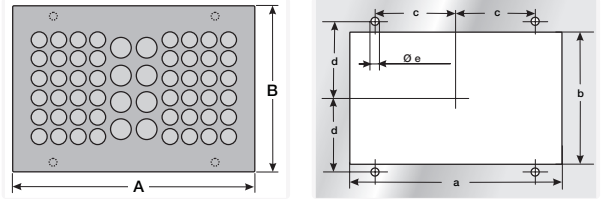

### KDP metal cablequick® cable entry plate FDA dimensi-

Article	Order No.	A mm	B mm	a mm	b mm	c mm	d mm	e mm
	87663963	145	100	132	82	50	45	4.5
FDA cablequick® KDP 100/18, V4A	87663958	145	100	132	82	50	45	4.5
FDA cablequick® KDP 100/24, V4A	87663957	145	100	132	82	50	45	4.5
FDA cablequick® KDP 100/30, V4A	87663950	145	100	132	82	50	45	4.5
cablequick® KDP 100/30B, V4A FDA	87663962	145	100	132	82	50	45	4.5
FDA cablequick® KDP 100/40, V4A	87663956	145	100	132	82	50	45	4.5
FDA cablequick® KDP 100/56, V4A	87663953	145	100	132	82	50	45	4.5

### Material properties



EPDM

### Thermal properties



Temperature / temperature range -30 °C – 90 °C

### Protection class



Protection class IP65

### Conformity



RoHS (EC Directive 2011/65/EU)

### Approvals and operating permits



FDA compliance



## cablequick<sup>®</sup> FDA Type 100 (100x145 mm)

### General information



Made in Switzerland

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described. The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described. A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information. All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge. They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose. Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information. Murrplastik accepts no liability for damage caused as a result of using our products. Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services. Our General Terms and Conditions apply.