

STRAIGHT GLOBE VALVE

DIN

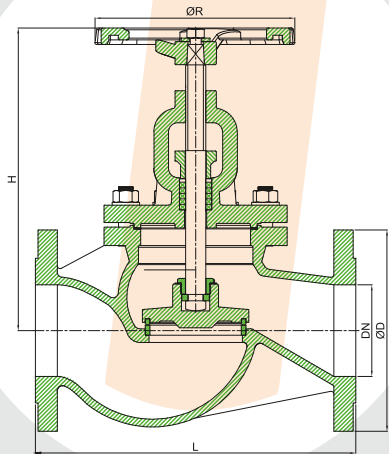


Fig 351AC

Cast Iron / Bronze
Stop Type

- DIN 3202 F1
- Bolted Bonnet
- Flanged PN 16

- Options
352AC With Indicator
417AC REG



DN [mm]	ØD [mm]	L [mm]	H [mm]	ØR [mm]	Weight [Kg]	IMPA	Order Code
15	95	130	165	120	3,8	755261	351AC015
20	105	150	135	120	4	755262	351AC020
25	115	160	175	140	5	755263	351AC025
32	140	180	180	140	7	755264	351AC032
40	150	200	220	160	11	755265	351AC040
50	165	230	230	160	13	755266	351AC050
65	185	290	245	180	18	755267	351AC065
80	200	310	295	200	25	755268	351AC080
100	220	350	330	225	35	755269	351AC100
125	250	400	365	250	55	755270	351AC125
150	285	480	420	300	75	755271	351AC150
175	315	550	500	400	115	-	351AC175
200	340	600	510	400	135	755273	351AC200

*All information are indicative data. JONAS has the rights to make changes without prior notice.