

# STRAIGHT STORM VALVE


DIN



**Fig 492CB**

Ductile Iron / Bronze  
With Closing Device

- DIN 87101
- Flanged PN 10
- Options  
493CB With Indicator

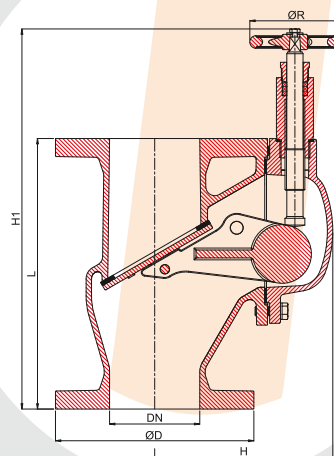

| DN<br>[mm] | ØD<br>[mm] | L<br>[mm] | H<br>[mm] | H1<br>[mm] | ØR<br>[mm] | Weight<br>[Kg] | IMPA   | Order Code |
|------------|------------|-----------|-----------|------------|------------|----------------|--------|------------|
| 50         | 165        | 200       | 140       | 310        | 100        | 14             | 754291 | 492CB050   |
| 65         | 185        | 240       | 150       | 335        | 100        | 17             | 754292 | 492CB065   |
| 80         | 200        | 260       | 175       | 390        | 100        | 22             | 754293 | 492CB080   |
| 100        | 220        | 300       | 200       | 425        | 100        | 28             | 754294 | 492CB100   |
| 125        | 250        | 350       | 220       | 480        | 125        | 42             | 754295 | 492CB125   |
| 150        | 285        | 400       | 245       | 525        | 125        | 55             | 754296 | 492CB150   |
| 200        | 340        | 500       | 315       | 625        | 160        | 101            | -      | 492CB200   |
| 250        | 395        | 600       | 400       | 750        | 200        | 150            | -      | 492CB250   |