

STRAIGHT QUICK CLOSING VALVE

DIN


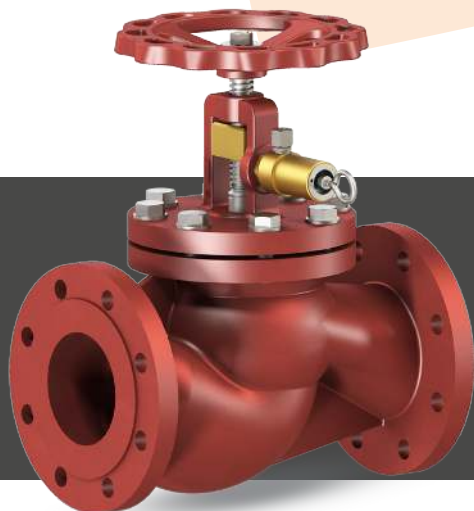


Fig 701DC

Ductile Iron / SS
Manual Operation

- DIN 3202 F1
- Bolted Bonnet
- Flanged PN 16

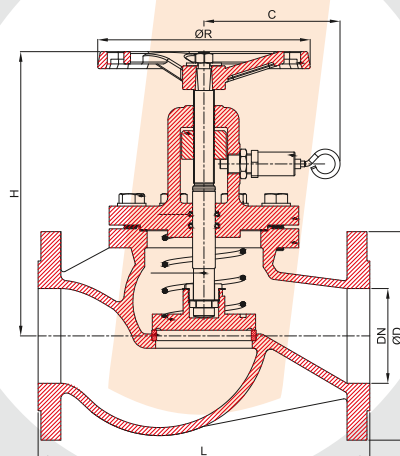

DN [mm]	ØD [mm]	L [mm]	H [mm]	C [mm]	ØR [mm]	Weight [Kg]	IMPA	Order Code
15	95	130	175	140	120	4	874601	701DC015
20	105	150	175	140	120	4,5	874602	701DC020
25	115	160	190	140	140	5	874603	701DC025
32	140	180	190	140	140	7	874604	701DC032
40	150	200	205	140	160	11	874605	701DC040
50	165	230	215	140	160	13	874606	701DC050
65	185	290	245	145	180	19	874607	701DC065
80	200	310	270	145	200	25	874608	701DC080
100	220	350	305	145	225	35	874609	701DC100
125	250	400	330	145	250	55	874610	701DC125
150	285	480	380	145	300	75	874641	701DC150
175	315	550	450	145	400	115	-	701DC175
200	340	600	450	150	400	135	874642	701DC200

*All information are indicative data. JONAS has the rights to make changes without prior notice.

jonasmarine.de

Jonas