

STRAIGHT QUICK CLOSING VALVE


DIN



Fig 701GC

Bronze / SS
Manual Operation

- DIN 3202 F1
- Flanged PN 16

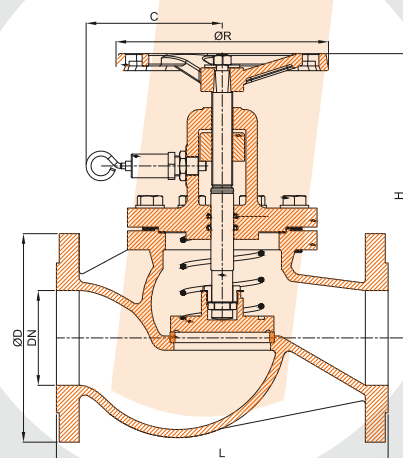

DN [mm]	ØD [mm]	L [mm]	H [mm]	C [mm]	ØR [mm]	Weight [Kg]	IMPA	Order Code
15	95	130	175	140	120	4	-	701GC015
20	105	150	175	140	120	4.5	-	701GC020
25	115	160	190	140	140	6	-	701GC025
32	140	180	190	140	140	8	-	701GC032
40	150	200	205	140	160	12	-	701GC040
50	165	230	215	140	160	14	-	701GC050
65	185	290	245	145	180	20	-	701GC065
80	200	310	270	145	200	26	-	701GC080
100	220	350	305	145	225	36	-	701GC100
125	250	400	330	145	250	58	-	701GC125
150	285	480	380	145	300	75	-	701GC150
175	315	550	450	145	400	110	-	701GC175
200	340	600	450	150	400	145	-	701GC200

*All information are indicative data. JONAS has the rights to make changes without prior notice.