

STRAIGHT QUICK CLOSING VALVE


DIN



Fig 702DC

Ductile Iron / SS
Hydraulic-Pneumatic-Manual Operation

- DIN 3202 F1
- With Pull Ring
- Flanged PN 16
- Options
719DC Limit Switch

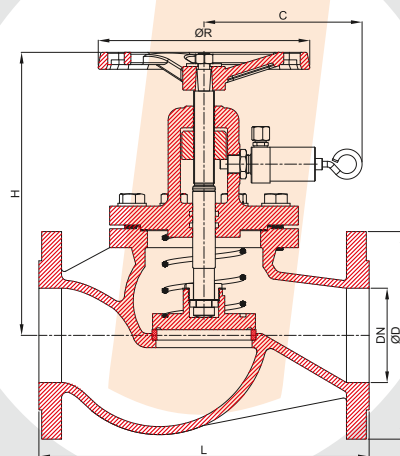

DN [mm]	ØD [mm]	L [mm]	H [mm]	C [mm]	ØR [mm]	Weight [Kg]	IMPA	Order Code
15	95	130	175	165	120	4	874621	702DC015
20	105	150	175	165	120	4.5	874622	702DC020
25	115	160	190	165	140	5	874623	702DC025
32	140	180	190	165	140	7	874624	702DC032
40	150	200	205	165	160	11	874625	702DC040
50	165	230	215	165	160	13	874626	702DC050
65	185	290	245	170	180	19	874627	702DC065
80	200	310	270	170	200	25	874628	702DC080
100	220	350	305	170	225	35	874629	702DC100
125	250	400	330	170	250	55	874630	702DC125
150	285	480	380	170	300	75	874645	702DC150
175	315	550	450	170	400	115	-	702DC175
200	340	600	450	175	400	135	874646	702DC200

*All information are indicative data. JONAS has the rights to make changes without prior notice.