

STRAIGHT QUICK CLOSING VALVE


DIN



Fig 702FC

Cast Steel / SS
Hydraulic-Pneumatic-Manual Operation

- DIN 3202 F1
- With Pull Ring
- Flanged PN 16
- Options
719FC Limit Switch

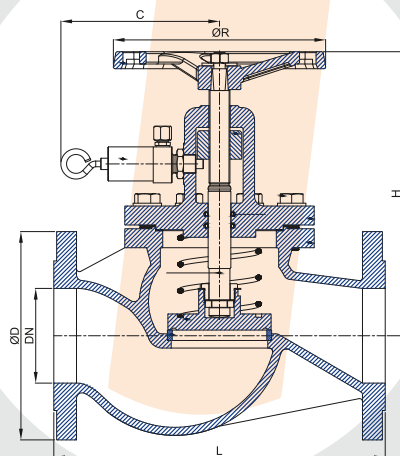

DN [mm]	ØD [mm]	L [mm]	H [mm]	C [mm]	ØR [mm]	Weight [Kg]	IMPA	Order Code
20	105	150	175	165	120	4.5	-	702FC020
25	115	160	190	165	140	5	-	702FC025
32	140	180	190	165	140	7	-	702FC032
40	150	200	205	165	160	11	-	702FC040
50	165	230	215	165	160	13	-	702FC050
65	185	290	245	170	180	19	-	702FC065
80	200	310	270	170	200	25	-	702FC080
100	220	350	305	170	225	35	-	702FC100
125	250	400	330	170	250	55	-	702FC125
150	285	480	380	170	300	75	-	702FC150
175	315	550	450	170	400	115	-	702FC175
200	340	600	450	175	400	135	-	702FC015
200	340	600	450	175	400	135	-	702FC200

*All information are indicative data. JONAS has the rights to make changes without prior notice.

jonasmarine.de

Jonas