

STRAIGHT QUICK CLOSING VALVE


DIN



Fig 703DC

Ductile Iron / SS
Hydraulic-Pneumatic-Manual Operation

- DIN 3202 F1
- With Push Button
- Flanged PN 16

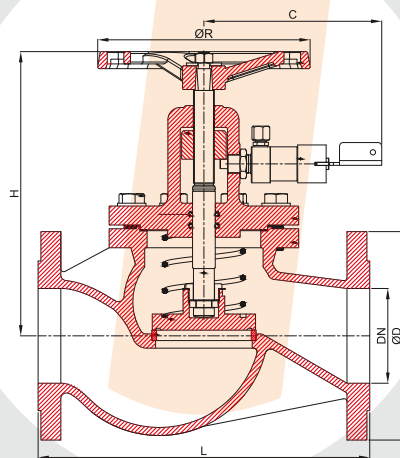

DN [mm]	ØD [mm]	L [mm]	H [mm]	C [mm]	ØR [mm]	Weight [Kg]	IMPA	Order Code
15	95	130	175	185	120	4	-	703DC015
20	105	150	175	185	120	4,5	-	703DC020
25	115	160	190	185	140	5	-	703DC025
32	140	180	190	185	140	7	-	703DC032
40	150	200	205	185	160	11	-	703DC040
50	165	230	215	185	160	13	-	703DC050
65	185	290	245	190	180	19	-	703DC065
80	200	310	270	190	200	25	-	703DC080
100	220	350	305	190	225	35	-	703DC100
125	250	400	330	190	250	55	-	703DC125
150	285	480	380	190	300	75	-	703DC150
175	315	550	450	190	400	115	-	703DC175
200	340	600	450	195	400	135	-	703DC200

*All information are indicative data. JONAS has the rights to make changes without prior notice.