

ANGLE QUICK CLOSING VALVE

DIN


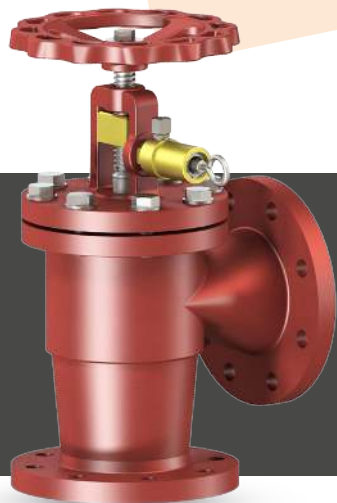


Fig 704DC

Ductile Iron / SS
Manual Operation

- DIN 3202 F32
- Bolted Bonnet
- Flanged PN 16

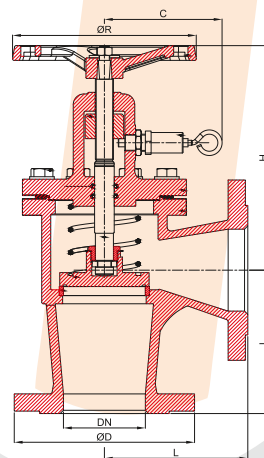

DN [mm]	ØD [mm]	L [mm]	H [mm]	C [mm]	ØR [mm]	Weight [Kg]	IMPA	Order Code
15	95	90	170	140	120	3.8	874611	704DC015
20	105	95	170	140	120	4	874612	704DC020
25	115	100	180	140	140	5	874613	704DC025
32	140	105	180	140	140	7	874614	704DC032
40	150	115	200	140	160	10	874615	704DC040
50	165	125	200	140	160	12	874616	704DC050
65	185	145	225	145	180	17	874617	704DC065
80	200	155	245	145	200	23	874618	704DC080
100	220	175	275	145	225	33	874619	704DC100
125	250	200	275	145	250	50	874620	704DC125
150	285	225	315	145	300	70	874643	704DC150
175	315	250	360	145	400	90	-	704DC175
200	340	275	360	150	400	110	874644	704DC200

*All information are indicative data. JONAS has the rights to make changes without prior notice.