

ANGLE QUICK CLOSING VALVE


DIN



Fig 704FC

Cast Steel / SS
Manual Operation

- DIN 3202 F32
- Flanged PN 16

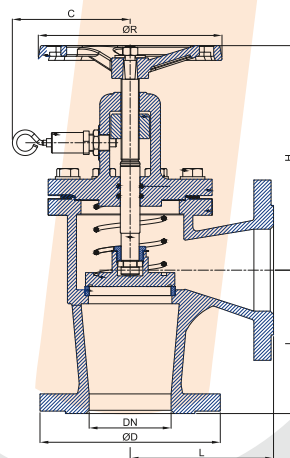

DN [mm]	ØD [mm]	L [mm]	H [mm]	C [mm]	ØR [mm]	Weight [Kg]	IMPA	Order Code
15	95	90	170	140	120	3.8	-	704FC015
20	105	95	170	140	120	4	-	704FC020
25	115	100	180	140	140	5	-	704FC025
32	140	105	180	140	140	7	-	704FC032
40	150	115	200	140	160	10	-	704FC040
50	165	125	200	140	160	12	-	704FC050
65	185	145	225	145	180	17	-	704FC065
80	200	155	245	145	200	23	-	704FC080
100	220	175	275	145	225	33	-	704FC100
125	250	200	275	145	250	50	-	704FC125
150	285	225	315	145	300	70	-	704FC150
175	315	250	360	145	400	90	-	704FC175
200	340	275	360	150	400	110	-	704FC200

*All information are indicative data. JONAS has the rights to make changes without prior notice.