

ANGLE QUICK CLOSING VALVE


DIN



Fig 704GC

Bronze / SS
Manual Operation

- DIN 3202 F32
- Flanged PN 16

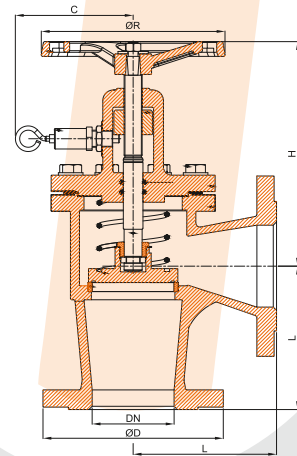

DN [mm]	ØD [mm]	L [mm]	H [mm]	C [mm]	ØR [mm]	Weight [Kg]	IMPA	Order Code
15	95	90	170	140	120	4	-	704GC015
20	105	95	170	140	120	4.5	-	704GC020
25	115	100	180	140	140	6	-	704GC025
32	140	105	180	140	140	9	-	704GC032
40	150	115	200	140	160	12	-	704GC040
50	165	125	200	140	160	14	-	704GC050
65	185	145	225	145	180	19	-	704GC065
80	200	155	245	145	200	25	-	704GC080
100	220	175	275	145	225	32	-	704GC100
125	250	200	275	145	250	55	-	704GC125
150	285	225	315	145	300	70	-	704GC150
175	315	250	360	145	400	100	-	704GC175
200	340	275	360	150	400	130	-	704GC200

*All information are indicative data. JONAS has the rights to make changes without prior notice.