

ANGLE QUICK CLOSING VALVE

DIN


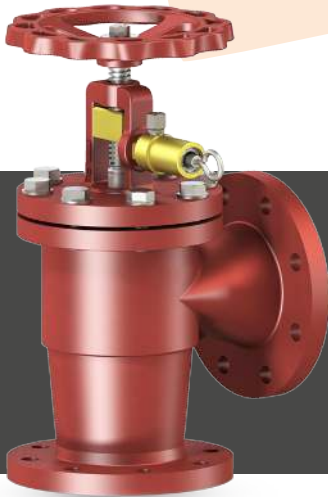


Fig 705DC

Ductile Iron / SS
Hydraulic-Pneumatic-Manual Operation

- DIN 3202 F32
- With Pull Ring
- Flanged PN 16
- Options
720DC Limit Switch

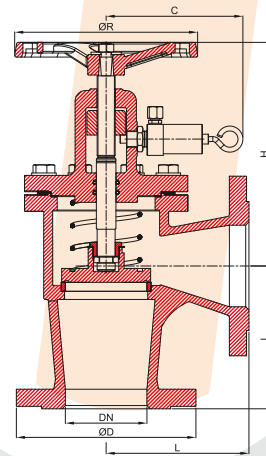

DN [mm]	ØD [mm]	L [mm]	H [mm]	C [mm]	ØR [mm]	Weight [Kg]	IMPA	Order Code
15	95	90	170	165	120	3.8	874631	705DC015
20	105	95	170	165	120	4	874632	705DC020
25	115	100	180	165	140	5	874633	705DC025
32	140	105	180	165	140	7	874634	705DC032
40	150	115	200	165	160	10	874635	705DC040
50	165	125	200	165	160	12	874636	705DC050
65	185	145	225	170	180	17	874637	705DC065
80	200	155	245	170	200	23	874638	705DC080
100	220	175	275	170	225	33	874639	705DC100
125	250	200	275	170	250	50	874640	705DC125
150	285	225	315	170	300	70	874647	705DC150
175	315	250	360	170	400	90	-	705DC175
200	340	275	360	175	400	110	874648	705DC200

*All information are indicative data. JONAS has the rights to make changes without prior notice.