

ANGLE QUICK CLOSING VALVE


DIN



Fig 705GC

Bronze / SS
Hydraulic-Pneumatic-Manual Operation

- DIN 3202 F32
- With Pull Ring
- Flanged PN 16
- Options
720GC Limit Switch

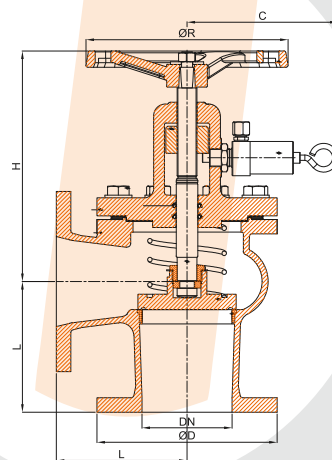

DN [mm]	ØD [mm]	L [mm]	H [mm]	C [mm]	ØR [mm]	Weight [Kg]	IMPA	Order Code
15	95	90	170	165	120	4	-	705GC015
20	105	95	170	165	120	4.5	-	705GC020
25	115	100	180	165	140	6	-	705GC025
32	140	105	180	165	140	9	-	705GC032
40	150	115	200	165	160	12	-	705GC040
50	165	125	200	165	160	14	-	705GC050
65	185	145	225	170	180	19	-	705GC065
80	200	155	245	170	200	25	-	705GC080
100	220	175	275	170	225	32	-	705GC100
125	250	200	275	170	250	55	-	705GC125
150	285	225	315	170	300	70	-	705GC150
175	315	250	360	170	400	100	-	705GC175
200	340	275	360	175	400	130	-	705GC200

*All information are indicative data. JONAS has the rights to make changes without prior notice.