

ANGLE QUICK CLOSING VALVE

DIN


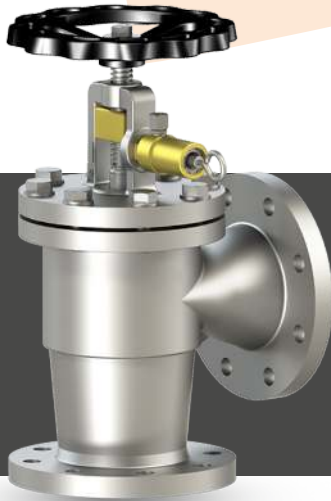


Fig 705LC

SS AISI316

Hydraulic-Pneumatic-Manual Operation

- DIN 3202 F32
- With Pull Ring
- Flanged PN 16
- Options
720LC Limit Switch

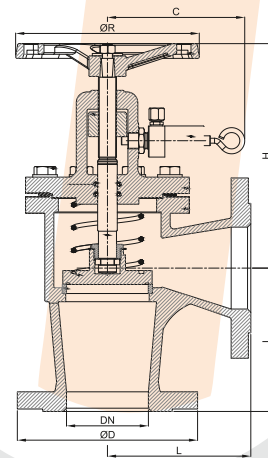

DN [mm]	ØD [mm]	L [mm]	H [mm]	C [mm]	ØR [mm]	Weight [Kg]	IMPA	Order Code
20	105	95	170	165	120	4	-	705LC020
25	115	100	180	165	140	5	-	705LC025
32	140	105	180	165	140	7	-	705LC032
40	150	115	200	165	160	10	-	705LC040
50	165	125	200	165	160	12	-	705LC050
65	185	145	225	170	180	17	-	705LC065
80	200	155	245	170	200	23	-	705LC080
100	220	175	275	170	225	33	-	705LC100
125	250	200	275	170	250	50	-	705LC125
150	285	225	315	170	300	70	-	705LC150
175	315	250	360	170	400	90	-	705LC175
200	340	275	360	175	400	130	-	705LC015
200	340	275	360	175	400	110	-	705LC200

*All information are indicative data. JONAS has the rights to make changes without prior notice.