

ANGLE QUICK CLOSING VALVE

DIN

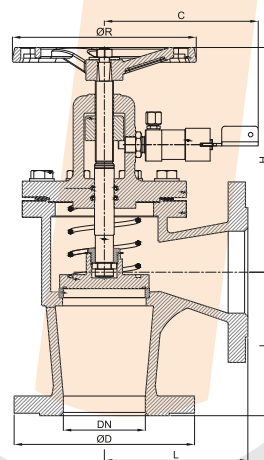


Fig 706LC

SS AISI316

Hydraulic-Pneumatic-Manual Operation

- DIN 3202 F32
- With Push Button
- Flanged PN 16



DN [mm]	ØD [mm]	L [mm]	H [mm]	C [mm]	ØR [mm]	Weight [Kg]	IMPA	Order Code
15	95	90	170	185	120	3,8	-	706LC015
20	105	95	170	185	120	4	-	706LC020
25	115	100	180	185	140	5	-	706LC025
32	140	105	180	185	140	7	-	706LC032
40	150	115	200	185	160	10	-	706LC040
50	165	125	200	185	160	12	-	706LC050
65	185	145	225	190	180	17	-	706LC065
80	200	155	245	190	200	23	-	706LC080
100	220	175	275	190	225	33	-	706LC100
125	250	200	275	190	250	50	-	706LC125
150	285	225	315	190	300	70	-	706LC150
175	315	250	360	190	400	90	-	706LC175
200	340	275	360	195	400	110	-	706LC200

*All information are indicative data. JONAS has the rights to make changes without prior notice.

jonasmarine.de

Jonas