

ANGLE FIRE HOSE VALVE


DIN



Fig 772GC

Bronze
With Female Adaptor

- DIN 86211
- Bolted Bonnet
- Flanged PN 16

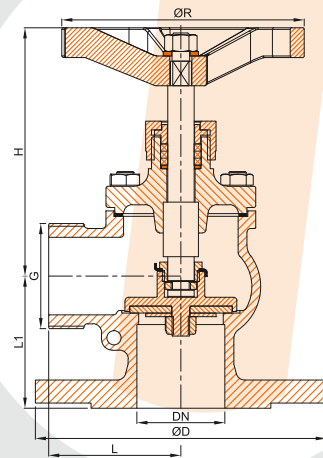

DN [mm]	G ["]	ØD [mm]	L [mm]	L1 [mm]	H Open [mm]	ØR [mm]	Weight [kg]	IMPA	Order Code
40	1 1/2	150	97	75	160	140	6.3	-	772GC040
50	2	165	98	75	160	140	7.2	-	772GC050
65	2 1/2	185	118	90	180	160	11.5	-	772GC065