

## Soft-start and quick exhaust valves MS-SV, MS series

**FESTO**



Festo core product range  
Covers 80% of your automation tasks

Worldwide:

Always in stock

Superb:

Festo quality at an attractive price

Easy:

Reduces procurement and storing complexity

★ Ready for dispatch from the Festo factory in 24 hours  
Held in stock in 13 service centres worldwide  
More than 2200 products








★ Ready for dispatch in 5 days maximum from stock  
Assembled for you in 4 service centres worldwide  
Up to  $6 \times 10^{12}$  variants per product series



# Soft-start and quick exhaust valves MS-SV, MS series



Product range overview – MS series service units

Type	Size	Pneumatic connection in housing	Connecting plate	Pressure regulation range [bar]						Grade of filtration [µm]			
				0.05 ...	0.05 ...	0.1 ...	0.3 ...	0.1 ...	0.5 ...	0.01	1	5	40
Code			AG.../AQ...	D2	D4	D5	D6	D7	D8	A	B	C	E
<b>Service unit combinations</b>													
<b>MSB-FRC</b> 	4	G1/8, G1/4	G1/8, G1/4, G3/8	-	-	-	■	■	-	-	-	■	■
	6	G1/4, G3/8, G1/2	G1/4, G3/8, G1/2, G3/4	-	-	-	■	■	-	-	-	■	■
	9	-	-	-	-	-	-	-	-	-	-	-	-
	12	-	-	-	-	-	-	-	-	-	-	-	-
<b>Service unit combinations (further variants can be ordered using the configurator → Internet: msb4, msb6 or msb9)</b>													
<b>MSB</b> 	4	G1/4	G1/8, G1/4, G3/8	-	-	-	■	■	-	-	-	■	■
	6	G1/2	G1/4, G3/8, G1/2, G3/4	-	-	-	■	■	-	-	-	■	■
	9	-	-	-	-	-	-	-	-	-	-	-	-
	12	-	-	-	-	-	-	-	-	-	-	-	-
<b>Individual devices</b>													
<b>Filter regulators</b> <b>MS-LFR</b> 	4	G1/8, G1/4	G1/8, G1/4, G3/8	-	-	■	■	■	-	-	-	■	■
	6	G1/4, G3/8, G1/2	G1/4, G3/8, G1/2, G3/4	-	-	■	■	■	■	-	-	■	■
	9	G3/4, G1	G1/2, G3/4, G1, G1 1/4, G1 1/2	-	-	■	■	■	■	-	-	■	■
	12	-	G1, G1 1/4, G1 1/2, G2	-	-	-	■	■	■	-	-	■	■
<b>Filters</b> <b>MS-LF</b> 	4	G1/8, G1/4	G1/8, G1/4, G3/8	-	-	-	-	-	-	-	-	■	■
	6	G1/4, G3/8, G1/2	G1/4, G3/8, G1/2, G3/4	-	-	-	-	-	-	-	-	■	■
	9	G3/4, G1	G1/2, G3/4, G1, G1 1/4, G1 1/2	-	-	-	-	-	-	-	-	■	■
	12	-	G1, G1 1/4, G1 1/2, G2	-	-	-	-	-	-	-	-	■	■
<b>Fine and micro filters</b> <b>MS-LFM</b> 	4	G1/8, G1/4	G1/8, G1/4, G3/8	-	-	-	-	-	■	■	-	-	
	6	G1/4, G3/8, G1/2	G1/4, G3/8, G1/2, G3/4	-	-	-	-	-	■	■	-	-	
	9	G3/4, G1	G1/2, G3/4, G1, G1 1/4, G1 1/2	-	-	-	-	-	■	■	-	-	
	12	-	G1, G1 1/4, G1 1/2, G2	-	-	-	-	-	■	■	-	-	
<b>Activated carbon filters</b> <b>MS-LFX</b> 	4	G1/8, G1/4	G1/8, G1/4, G3/8	-	-	-	-	-	-	-	-	-	
	6	G1/4, G3/8, G1/2	G1/4, G3/8, G1/2, G3/4	-	-	-	-	-	-	-	-	-	
	9	G3/4, G1	G1/2, G3/4, G1, G1 1/4, G1 1/2	-	-	-	-	-	-	-	-	-	
	12	-	G1, G1 1/4, G1 1/2, G2	-	-	-	-	-	-	-	-	-	
<b>Water separators</b> <b>MS-LWS</b> 	4	-	-	-	-	-	-	-	-	-	-	-	
	6	G1/4, G3/8, G1/2	G1/4, G3/8, G1/2, G3/4	-	-	-	-	-	-	-	-	-	
	9	G3/4, G1	G1/2, G3/4, G1, G1 1/4, G1 1/2	-	-	-	-	-	-	-	-	-	
	12	-	G1, G1 1/4, G1 1/2, G2	-	-	-	-	-	-	-	-	-	

# Soft-start and quick exhaust valves MS-SV, MS series

Product range overview – MS series service units

Type	Size	Bowl guard		Condensate drains				Pressure indicator				Security		Options		→ Page/ Internet	
		Plastic bowl with plastic bowl guard	Metal bowl	Manual rotary	Semi-automatic	Fully automatic	External, fully automatic, electrical	Cover plate (without pressure gauge)	Integrated MS pressure gauge	Adapter plate for EN pressure gauge G1/8	Adapter plate for EN pressure gauge G1/4	Pressure sensor	Rotary knob with detent, lockable via accessories	Rotary knob with integrated lock	Silencer		Flow direction from right to left
Code		R	U	M	H	V	E...	VS	AG	A8	A4	AD...	AS	E11	S	Z	
<b>Service unit combinations</b>																	
<b>MSB-FRC</b>	4	■	-	■	-	■	-	-	■	-	-	-	■	-	-	■	msb4
	6	■	■	■	-	■	-	-	■	-	-	-	■	-	-	■	msb6
	9	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	12	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
<b>Service unit combinations</b>																	
<b>MSB</b>	4	■	■	■	-	■	-	-	■	-	-	-	■	-	-	■	msb4
	6	■	■	■	-	■	-	-	■	-	-	-	■	-	-	■	msb6
	9	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	12	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
<b>Individual devices</b>																	
Filter regulators <b>MS-LFR</b>	4	■	■	■	■	■	-	■	■	■	■	■	■	■	-	■	ms4-lfr
	6	■	■	■	■	■	■	■	■	■	■	■	■	■	-	■	ms6-lfr
	9	-	■	■	■	■	■	■	■	■	■	■	■	■	-	■	ms9-lfr
	12	-	■	■	-	■	■	■	■	■	■	■	■	■	-	■	ms12-lfr
Filters <b>MS-LF</b>	4	■	■	■	■	■	-	-	-	-	-	-	-	-	-	■	ms4-lf
	6	■	■	■	■	■	■	-	-	-	-	-	-	-	-	■	ms6-lf
	9	-	■	■	■	■	■	-	-	-	-	-	-	-	-	■	ms9-lf
	12	-	■	■	-	■	■	-	-	-	-	-	-	-	-	■	ms12-lf
Fine and micro filters <b>MS-LFM</b>	4	■	■	■	■	■	-	-	-	-	-	-	-	-	-	■	ms4-lfm
	6	■	■	■	■	■	■	-	-	-	-	-	-	-	-	■	ms6-lfm
	9	-	■	■	■	■	■	-	-	-	-	-	-	-	-	■	ms9-lfm
	12	-	■	■	-	■	■	-	-	-	-	-	-	-	-	■	ms12-lfm
Activated carbon filters <b>MS-LFX</b>	4	■	■	-	-	-	-	-	-	-	-	-	-	-	-	■	ms4-lfx
	6	■	■	-	-	-	-	-	-	-	-	-	-	-	-	■	ms6-lfx
	9	-	■	-	-	-	-	-	-	-	-	-	-	-	-	■	ms9-lfx
	12	-	■	-	-	-	-	-	-	-	-	-	-	-	-	■	ms12-lfx
Water separators <b>MS-LWS</b>	4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	6	-	■	-	-	■	■	-	-	-	-	-	-	-	-	■	ms6-lws
	9	-	■	-	-	■	■	-	-	-	-	-	-	-	-	■	ms9-lws
	12	-	■	-	-	■	■	-	-	-	-	-	-	-	-	■	ms12-lws

# Soft-start and quick exhaust valves MS-SV, MS series

Product range overview – MS series service units



Type	Size	Pneumatic connection in housing	Connecting plate	Pressure regulation range [bar]						Supply voltage			
				0.05 ... 0.7	0.05 ... 2.5	0.1 ... 4	0.3 ... 7	0.1 ... 12	0.5 ... 16	24 V DC, connection pattern to EN 175301	24 V DC, connection M12 to IEC 61076-2-101	110 V AC, connection pattern to EN 175301	230 V AC, connection pattern to EN 175301
Code			AG.../AQ...	D2	D4	D5	D6	D7	D8	V24	V24P	V110	V230
<b>Individual devices</b>													
Pressure regulators <b>MS-LR</b>		4	G1/8, G1/4	G1/8, G1/4, G3/8	-	-	■	■	■	-	-	-	-
		6	G1/4, G3/8, G1/2	G1/4, G3/8, G1/2, G3/4	-	-	■	■	■	■	-	-	-
		9	G3/4, G1	G1/2, G3/4, G1, G1 1/4, G1 1/2	-	-	■	■	■	■	-	-	-
		12	-	G1, G1 1/4, G1 1/2, G2	-	-	-	■	■	■	-	-	-
Pressure regulators <b>MS-LRB</b>		4	G1/4	G1/8, G1/4, G3/8	-	-	■	■	■	-	-	-	-
		6	G1/2	G1/4, G3/8, G1/2, G3/4	-	-	■	■	■	■	-	-	-
		9	-	-	-	-	-	-	-	-	-	-	-
		12	-	-	-	-	-	-	-	-	-	-	-
Precision pressure regulators <b>MS-LRP</b>		4	-	-	-	-	-	-	-	-	-	-	-
		6	G1/4, G3/8, G1/2	G1/4, G3/8, G1/2, G3/4	■	■	■	-	■	-	-	-	-
		9	-	-	-	-	-	-	-	-	-	-	-
		12	-	-	-	-	-	-	-	-	-	-	-
Precision pressure regulators <b>MS-LRPB</b>		4	-	-	-	-	-	-	-	-	-	-	-
		6	G1/2	G1/4, G3/8, G1/2, G3/4	■	■	■	-	■	-	-	-	-
		9	-	-	-	-	-	-	-	-	-	-	-
		12	-	-	-	-	-	-	-	-	-	-	-
Electrical pressure regulators <b>MS-LRE</b>		4	-	-	-	-	-	-	-	-	-	-	-
		6	G1/4, G3/8, G1/2	G1/4, G3/8, G1/2, G3/4	-	-	■	■	■	■	-	-	-
		9	-	-	-	-	-	-	-	-	-	-	-
		12	-	-	-	-	-	-	-	-	-	-	-
Lubricators <b>MS-LOE</b>		4	G1/8, G1/4	G1/8, G1/4, G3/8	-	-	-	-	-	-	-	-	-
		6	G1/4, G3/8, G1/2	G1/4, G3/8, G1/2, G3/4	-	-	-	-	-	-	-	-	-
		9	G3/4, G1	G1/2, G3/4, G1, G1 1/4, G1 1/2	-	-	-	-	-	-	-	-	-
		12	-	G1, G1 1/4, G1 1/2, G2	-	-	-	-	-	-	-	-	-
On-off valves, manually actuated <b>MS-EM(1)</b>		4	G1/8, G1/4	G1/8, G1/4, G3/8	-	-	-	-	-	-	-	-	-
		6	G1/4, G3/8, G1/2	G1/4, G3/8, G1/2, G3/4	-	-	-	-	-	-	-	-	-
		9	G3/4, G1	G1/2, G3/4, G1, G1 1/4, G1 1/2	-	-	-	-	-	-	-	-	-
		12	-	G1, G1 1/4, G1 1/2, G2	-	-	-	-	-	-	-	-	-
On-off valves, electrically actuated <b>MS-EE</b>		4	G1/8, G1/4	G1/8, G1/4, G3/8	-	-	-	-	-	-	■	-	■
		6	G1/4, G3/8, G1/2	G1/4, G3/8, G1/2, G3/4	-	-	-	-	-	-	■	-	■
		9	G3/4, G1	G1/2, G3/4, G1, G1 1/4, G1 1/2	-	-	-	-	-	-	■	■	■
		12	-	G1, G1 1/4, G1 1/2, G2	-	-	-	-	-	-	■	■	■
Soft-start valves, pneumatically actuated <b>MS-DL</b>		4	G1/8, G1/4	G1/8, G1/4, G3/8	-	-	-	-	-	-	-	-	-
		6	G1/4, G3/8, G1/2	G1/4, G3/8, G1/2, G3/4	-	-	-	-	-	-	-	-	-
		9	-	-	-	-	-	-	-	-	-	-	-
		12	-	G1, G1 1/4, G1 1/2, G2	-	-	-	-	-	-	-	-	-
Soft-start valves, electrically actuated <b>MS-DE</b>		4	G1/8, G1/4	G1/8, G1/4, G3/8	-	-	-	-	-	-	■	-	■
		6	G1/4, G3/8, G1/2	G1/4, G3/8, G1/2, G3/4	-	-	-	-	-	-	■	-	■
		9	-	-	-	-	-	-	-	-	-	-	-
		12	-	G1, G1 1/4, G1 1/2, G2	-	-	-	-	-	-	■	■	■

# Soft-start and quick exhaust valves MS-SV, MS series

Product range overview – MS series service units

Type	Size	Bowl guard		Pressure indicator				Security			Options		→ Page/ Internet
		Plastic bowl with plastic bowl guard	Metal bowl	Cover plate (without pressure gauge)	Integrated MS pressure gauge	Adapter plate for EN pressure gauge G1/8	Adapter plate for EN pressure gauge G1/4	Pressure sensor	Rotary knob with detent, lockable via accessories	Rotary knob with integrated lock	Silencer	Flow direction from right to left	
Code		R	U	VS	AG	A8	A4	AD...	AS	E11	S	Z	
<b>Individual devices</b>													
Pressure regulators <b>MS-LR</b>	4	-	-	■	■	■	■	■	■	■	-	■	ms4-lr
	6	-	-	■	■	-	■	■	■	■	-	■	ms6-lr
	9	-	-	■	■	-	■	■	■	■	-	■	ms9-lr
	12	-	-	■	■	-	■	-	■	■	-	■	ms12-lr
Pressure regulators <b>MS-LRB</b>	4	-	-	■	■	■	■	■	■	■	-	■	ms4-lrb
	6	-	-	■	■	-	■	■	■	■	-	■	ms6-lrb
	9	-	-	-	-	-	-	-	-	-	-	-	-
	12	-	-	-	-	-	-	-	-	-	-	-	-
Precision pressure regulators <b>MS-LRP</b>	4	-	-	-	-	-	-	-	-	-	-	-	-
	6	-	-	■	-	■	■	■	■	■	-	■	ms6-lrp
	9	-	-	-	-	-	-	-	-	-	-	-	-
	12	-	-	-	-	-	-	-	-	-	-	-	-
Precision pressure regulators <b>MS-LRPB</b>	4	-	-	-	-	-	-	-	-	-	-	-	-
	6	-	-	■	-	■	■	■	■	■	-	■	ms6-lrpb
	9	-	-	-	-	-	-	-	-	-	-	-	-
	12	-	-	-	-	-	-	-	-	-	-	-	-
Electrical pressure regulators <b>MS-LRE</b>	4	-	-	-	-	-	-	-	-	-	-	-	-
	6	-	-	■	■	-	■	-	-	-	-	■	ms6-lre
	9	-	-	-	-	-	-	-	-	-	-	-	-
	12	-	-	-	-	-	-	-	-	-	-	-	-
Lubricators <b>MS-LOE</b>	4	■	■	-	-	-	-	-	-	-	-	■	ms4-loe
	6	■	■	-	-	-	-	-	-	-	-	■	ms6-loe
	9	-	■	-	-	-	-	-	-	-	-	■	ms9-loe
	12	-	■	-	-	-	-	-	-	-	-	■	ms12-loe
On-off valves, manually actuated <b>MS-EM(1)</b>	4	-	-	■	■	■	■	■	-	-	■	■	ms4-em1
	6	-	-	■	■	-	■	■	-	-	■	■	ms6-em1
	9	-	-	■	■	-	■	-	-	-	■	■	ms9-em
	12	-	-	■	■	-	■	-	-	-	■	■	ms12-em
On-off valves, electrically actuated <b>MS-EE</b>	4	-	-	■	■	■	■	■	-	-	■	■	ms4-ee
	6	-	-	■	■	-	■	■	-	-	■	■	ms6-ee
	9	-	-	■	■	-	■	■	-	-	■	■	ms9-ee
	12	-	-	■	■	-	■	-	-	-	■	■	ms12-ee
Soft-start valves, pneumatically actuated <b>MS-DL</b>	4	-	-	■	■	■	■	■	-	-	-	■	ms4-dl
	6	-	-	■	■	-	■	■	-	-	-	■	ms6-dl
	9	-	-	-	-	-	-	-	-	-	-	-	-
	12	-	-	■	■	-	■	-	-	-	-	■	ms12-dl
Soft-start valves, electrically actuated <b>MS-DE</b>	4	-	-	■	■	■	■	■	-	-	-	■	ms4-de
	6	-	-	■	■	-	■	■	-	-	-	■	ms6-de
	9	-	-	-	-	-	-	-	-	-	-	-	-
	12	-	-	■	■	-	■	-	-	-	-	■	ms12-de

# Soft-start and quick exhaust valves MS-SV, MS series

Product range overview – MS series service units

Type	Size	Pneumatic connection in housing	Connecting plate	Performance Level			Supply voltage					
				Category 1, 1-channel	Category 3, 2-channel	Category 4, 2-channel with self-monitoring	24 V DC, Sub-D, 9-pin	24 V DC, connection pattern to EN 175301	24 V DC, connection M12 to IEC 61076-2-101	110/230 V AC, connection pattern to EN 175301	22 ... 31.6 V DC, connection M12, AS-i Safety at Work	
Code			AG.../AQ...	C	D	E	10V24	10V24/ V24	10V24P	V110/ V230	ASIS	
<b>Individual devices</b>												
Soft start and exhaust valves <b>MS-SV-C</b>		4	–									
		6	G $\frac{1}{2}$	G $\frac{1}{4}$ , G $\frac{3}{8}$ , G $\frac{1}{2}$ , G $\frac{3}{4}$	■	–	–	–	■	■	–	–
		9	G $\frac{3}{4}$ , G1	G $\frac{1}{2}$ , G $\frac{3}{4}$ , G1, G1 $\frac{1}{4}$ , G1 $\frac{1}{2}$	■	–	–	–	■	■	■	–
		12	–									
Soft start and exhaust valves <b>MS-SV-D</b>		4	–									
		6	G $\frac{1}{2}$	G $\frac{1}{4}$ , G $\frac{3}{8}$ , G $\frac{1}{2}$ , G $\frac{3}{4}$	–	■	–	–	■	■	–	–
		9	–									
		12	–									
Soft start and exhaust valves <b>MS-SV-E</b>		4	–									
		6	G $\frac{1}{2}$	G $\frac{1}{4}$ , G $\frac{3}{8}$ , G $\frac{1}{2}$ , G $\frac{3}{4}$	–	–	■	■	–	–	–	■
		9	–									
		12	–									
Membrane air dryers <b>MS-LDM1</b>		4	G $\frac{1}{8}$ , G $\frac{1}{4}$	G $\frac{1}{8}$ , G $\frac{1}{4}$ , G $\frac{3}{8}$	–	–	–	–	–	–	–	–
		6	G $\frac{1}{4}$ , G $\frac{3}{8}$ , G $\frac{1}{2}$	G $\frac{1}{4}$ , G $\frac{3}{8}$ , G $\frac{1}{2}$ , G $\frac{3}{4}$	–	–	–	–	–	–	–	–
		9	–									
		12	–									
Branching modules <b>MS-FRM</b>		4	G $\frac{1}{8}$ , G $\frac{1}{4}$	G $\frac{1}{8}$ , G $\frac{1}{4}$ , G $\frac{3}{8}$	–	–	–	–	–	–	–	–
		6	G $\frac{1}{4}$ , G $\frac{3}{8}$ , G $\frac{1}{2}$	G $\frac{1}{4}$ , G $\frac{3}{8}$ , G $\frac{1}{2}$ , G $\frac{3}{4}$	–	–	–	–	–	–	–	–
		9	G $\frac{3}{4}$ , G1	G $\frac{1}{2}$ , G $\frac{3}{4}$ , G1, G1 $\frac{1}{4}$ , G1 $\frac{1}{2}$	–	–	–	–	–	–	–	–
		12	–	G1, G1 $\frac{1}{4}$ , G1 $\frac{1}{2}$ , G2	–	–	–	–	–	–	–	–
Distributor blocks <b>MS-FRM-FRZ</b>		4	G $\frac{1}{4}$	–	–	–	–	–	–	–	–	–
		6	G $\frac{1}{2}$	–	–	–	–	–	–	–	–	–
		9	–									
		12	–									
Flow sensors <b>SFAM</b>		4	–									
		6	G $\frac{1}{2}$	G $\frac{1}{2}$	–	–	–	–	–	–	–	–
		9	–	G1, G1 $\frac{1}{2}$	–	–	–	–	–	–	–	–
		12	–									

# Soft-start and quick exhaust valves MS-SV, MS series


Product range overview – MS series service units

Type	Size	Bowl guard		Pressure indicator					Switch output		Options		→ Page/ Internet
		Plastic bowl with plastic bowl guard	Metal bowl	Cover plate (without pressure gauge)	Integrated MS pressure gauge	Adapter plate for EN pressure gauge G <sup>1</sup> / <sub>8</sub>	Adapter plate for EN pressure gauge G <sup>1</sup> / <sub>4</sub>	Pressure sensor	2x PNP or NPN, 1 analogue output 4 ... 20 mA	2x PNP or NPN, 1 analogue output 0 ... 10 V	Silencer	Flow direction from right to left	
Code		R	U	VS	AG	A8	A4	AD...	2SA	2SV	S	Z/R	
<b>Individual devices</b>													
Soft start and exhaust valves <b>MS-SV-C</b>	4	-	-	-	-	-	-	-	-	-	-	-	-
	6	-	-	■	■	-	■	■	-	-	■	■	8
	9	-	-	■	■	-	■	■	-	-	■	■	44
	12	-	-	-	-	-	-	-	-	-	-	-	-
Soft start and exhaust valves <b>MS-SV-D</b>	4	-	-	-	-	-	-	-	-	-	-	-	-
	6	-	-	■	■	-	■	■	-	-	■	■	18
	9	-	-	-	-	-	-	-	-	-	-	-	-
	12	-	-	-	-	-	-	-	-	-	-	-	-
Soft start and exhaust valves <b>MS-SV-E</b>	4	-	-	-	-	-	-	-	-	-	-	-	-
	6	-	-	■	■	-	■	■	-	-	■	■	30
	9	-	-	-	-	-	-	-	-	-	-	-	-
	12	-	-	-	-	-	-	-	-	-	-	-	-
Membrane air dryers <b>MS-LDM1</b>	4	-	■	-	-	-	-	-	-	-	-	■	ms4-ldm1
	6	-	■	-	-	-	-	-	-	-	-	■	ms6-ldm1
	9	-	-	-	-	-	-	-	-	-	-	-	-
	12	-	-	-	-	-	-	-	-	-	-	-	-
Branching modules <b>MS-FRM</b>	4	-	-	■	■	■	■	■	-	-	-	■	ms4-frm
	6	-	-	■	■	-	■	■	-	-	-	■	ms6-frm
	9	-	-	■	■	-	■	■	-	-	-	■	ms9-frm
	12	-	-	■	-	-	-	-	-	-	-	-	ms12-frm
Distributor blocks <b>MS-FRM-FRZ</b>	4	-	-	-	-	-	-	-	-	-	-	■	ms4-frm
	6	-	-	-	-	-	-	-	-	-	-	■	ms6-frm
	9	-	-	-	-	-	-	-	-	-	-	-	-
	12	-	-	-	-	-	-	-	-	-	-	-	-
Flow sensors <b>SFAM</b>	4	-	-	-	-	-	-	-	-	-	-	-	-
	6	-	-	-	-	-	-	-	■	■	-	■	sfam-62
	9	-	-	-	-	-	-	-	■	■	-	■	sfam-90
	12	-	-	-	-	-	-	-	-	-	-	-	-

# Soft-start and quick exhaust valves MS6-SV-C, MS series

Peripherals overview

## Soft-start and quick exhaust valve MS6-SV-C

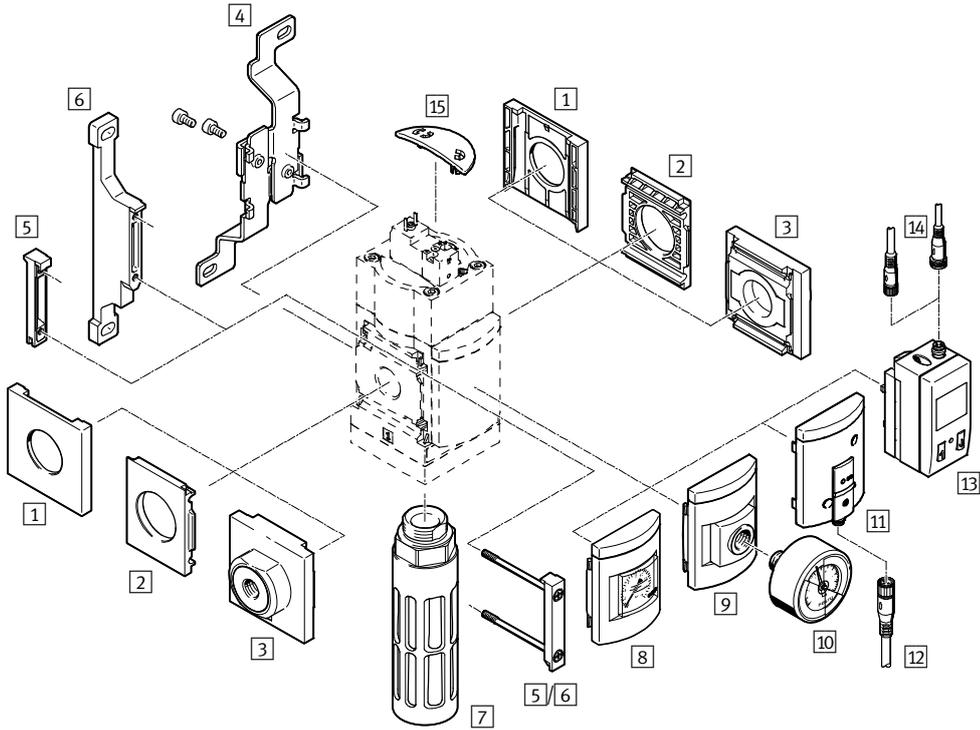


-  - Note

Additional accessories:

- Module connector for combination with size MS4/MS6 or size MS9 → Internet: amv, rmv, armv
- Adapter plate for mounting on profiles → Internet: ipm-80, ipm-40-80, ipm-80-80

Supply voltage  
10V24

Supply voltage  
10V24P

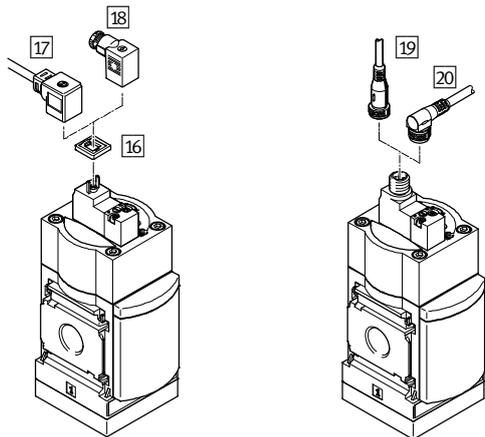

# Soft-start and quick exhaust valves MS6-SV-C, MS series

Peripherals overview

Mounting attachments and accessories						
		Individual device		Combination		→ Page/Internet
		Without connecting plate	With connecting plate	Without connecting plate	With connecting plate	
1	Cover cap MS6-END	-	-	■	-	ms6-end
2	Mounting plate MS6-AEND	■ <sup>1)</sup>	-	■ <sup>1)</sup>	-	ms6-aend
3	Connecting plate-SET MS6-AG...	-	■ <sup>1)</sup>	-	■ <sup>1)</sup>	ms6-ag
	Connecting plate-SET MS6-AQ...	-	■ <sup>1)</sup>	-	■ <sup>1)</sup>	ms6-aq
4	Mounting bracket MS6-WB	■	■	-	-	ms6-wb
5	Module connector MS6-MV	-	■	■	■	ms6-mv
6	Mounting bracket MS6-WP	■	■	■	■	ms6-wp
	Mounting bracket (not shown) MS6-WPB/WPE/WPM	■	■	■	■	ms6-wp
7	Silencer U-3/4-B	■	■	■	■	58
8	MS pressure gauge AG/RG	■	■	■	■	16
9	Adapter plate for EN pressure gauge 1/4 A4	■	■	■	■	16
10	Pressure gauge MA	■	■	■	■	59
11	Pressure sensor with operational status indicator AD7 ... AD10	■	■	■	■	16
12	Connecting cable NEBU-M8...-LE3	■	■	■	■	59
13	Pressure sensor with LCD display AD1 ... AD4	■	■	■	■	16
14	Connecting cable NEBU-M8...-LE3/NEBU-M12...-LE4	■	■	■	■	59
15	Cover MS6-SV-C-MK	■	■	■	■	57
16	Illuminating seal MEB-LD	■	■	■	■	59
17	Plug socket with cable KMEB	■	■	■	■	58
18	Plug socket MSSD-EB	■	■	■	■	58
19	Connecting cable NEBU-M12G5	■	■	■	■	59
20	Connecting cable NEBU-M12W5	■	■	■	■	59

1) Module connector MS6-MV [5] or mounting bracket MS6-WP/WPB/WPE/WPM [6] is required for mounting.

# Soft-start and quick exhaust valves MS6-SV-C, MS series

Type codes

		MS	6	-	SV	-	1/2	-	C	-	10V24	-	S
<b>Series</b>													
MS	Standard service unit												
<b>Size</b>													
6	Grid dimension 62 mm												
<b>Service function</b>													
SV	Soft-start and quick exhaust valve												
<b>Pneumatic connection</b>													
1/2	Female thread G1/2												
<b>Performance level</b>													
C	Category 1, to EN ISO 13849-1												
<b>Supply voltage</b>													
10V24	Supply voltage 24 V DC												
<b>Silencer</b>													
S	Silencer												


**Additional variants can be ordered using the modular product system → 16**

- Pneumatic connection
- Supply voltage
- Pressure gauge/pressure gauge alternatives
- Alternative pressure gauge scale
- Type of mounting
- Tamper protection
- Flow direction

# Soft-start and quick exhaust valves MS6-SV-C, MS series

Technical data

Function

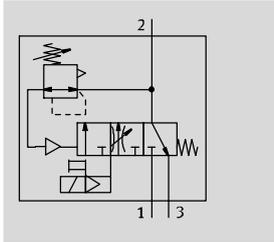

- - Flow rate  
5,700 l/min
- - Temperature range  
0 ... +60 °C
- - Operating pressure  
3 ... 10 bar
- - [www.festo.com](http://www.festo.com)



Electro-pneumatic soft-start and quick exhaust valve for gradual pressurisation and quick exhausting of system components (single channel).

The main flow control valve in the cover permits a gradual build-up of output pressure p2. Once the output pressure p2 has reached the set pressure switchover point (switching pressure), the valve opens and the full operating pressure p1 is present at the output.

- Suitable for applications with high flow rates and restricted space with medium safety requirements up to controller category 1, performance level "c"
- High volumetric flow rate for pressurisation and venting
- The filling flow rate can be set via a flow control valve for gradual pressure build-up
- Adjustable pressure switchover point
- Optional pressure sensor
- Optional cover for the control sections as tamper protection

Safety characteristics	
Conforms to standard	EN ISO 13849-1
Safety function	Venting
Performance level (PL)	Venting: up to category 1, PL c
Proven component	Yes
CE marking (see declaration of conformity) <sup>1)</sup>	To EC Machinery Directive
Shock resistance	Shock test with severity level 2 according to FN 942017-5 and EN 60068-2-27
Vibration resistance	Transport application test with severity level 2 according to FN 942017-4 and EN 60068-2-6

1) Additional information [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

General technical data		
Pneumatic connection 1, 2	Female thread	G1/2
	Connecting plate AG...	G1/4, G3/8, G1/2 or G3/4
	Connecting plate AQ...	NPT1/4, NPT3/8, NPT1/2 or NPT3/4
Pneumatic connection 3		G3/4
Actuation type		Electric
Design		Piston spool valve
Type of mounting		Via accessories
		In-line installation
Mounting position		Any
Pressure indicator		Via pressure sensor for displaying output pressure via LCD display and electrical output
		Via pressure sensor for displaying output pressure via operational status indicator and electrical output
		Via pressure gauge for displaying output pressure
		Via pressure gauge with red/green scale for displaying output pressure
		G1/4 prepared

• † - Note: This product conforms to ISO 1179-1 and to ISO 228-1

# Soft-start and quick exhaust valves MS6-SV-C, MS series

FESTO

Technical data

General technical data	
Valve function	3/2-way valve, closed, single solenoid Soft-start function, adjustable
Non-overlapping	Yes
Exhaust function	No flow control
Reset method	Mechanical spring
Type of control	Piloted
Pilot air supply	Internal
Sealing principle	Soft

Flow rate characteristics	
Pneumatic connection	Female thread G1/2
Standard nominal flow rate $q_{nN}^{1)}$ [l/min]	
In main flow direction 1 $\rightarrow$ 2	5,700
Standard flow rate $q_N$ [l/min], $p_2 = 6$ bar	
In venting direction 2 $\rightarrow$ 3	7,600 <sup>2)</sup>
C value [l/s*min]	
In main flow direction 1 $\rightarrow$ 2	23.2
b value	
In main flow direction 1 $\rightarrow$ 2	0.4

1) Measured at  $p_1 = 6$  bar and  $p_2 = 5$  bar,  $\Delta p = 1$  bar

2) Measured with respect to atmosphere with silencer S

Electrical data		
Coil characteristics	10V24, 10V24P	24 V DC: 2.5 W; permissible voltage fluctuations $-10\%/+10\%$
Electrical connection	10V24	Plug, 2-pin, to EN 175301-803, type C
	10V24P	M12x1, 2-pin, to IEC 61076-2-101
Protection class		IP65 with plug socket
Duty cycle	[%]	100
Switching time off	[ms]	65
Switching time on	[ms]	370

Operating and environmental conditions		
Operating pressure	[bar]	3 ... 10
Operating medium		Compressed air according to ISO 8573-1:2010 [7:4:4]
Note on operating/pilot medium		Lubricated operation possible (in which case lubricated operation will always be required)
Ambient temperature	[°C]	0 ... +60 (0 ... +50) <sup>1)</sup>
Temperature of medium	[°C]	0 ... +60 (0 ... +50) <sup>1)</sup>
Storage temperature	[°C]	-10 ... +60 (0 ... +50) <sup>1)</sup>
Corrosion resistance class CRC <sup>2)</sup>		2
CE marking (see declaration of conformity) <sup>3)</sup>		To EU Machinery Directive

1) With pressure sensor AD...

2) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

3) Additional information [www.festo.com/sp](http://www.festo.com/sp) → Certificates.


Weight [g]	
Soft-start and quick exhaust valve	886
Soft-start and quick exhaust valve with silencer S	1,006

# Soft-start and quick exhaust valves MS6-SV-C, MS series

Technical data

Materials	
Housing	Die-cast aluminium
Piston rod	High-alloy stainless steel
Seals	NBR
Note on materials	RoHS-compliant

**Adjusting elements**

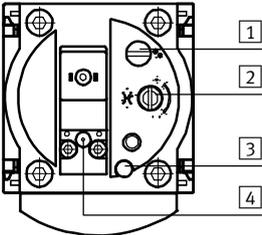


- 1 Screw for adjusting the pressure switchover point
  - Detenting/self-resetting as soon as the solenoid coil or manual override at the pilot solenoid valve is actuated.
- 2 Flow control screw for adjusting the filling time
- 3 Manual override at the soft-start and quick exhaust valve:
  - Non-detenting, actuation from above (with 10V24)
  - Non-detenting/detenting, actuation from above (with 10V24P)
- 4 Manual override at the pilot solenoid valve:
  - Non-detenting, actuation from above (with 10V24)
  - Non-detenting/detenting, actuation from above (with 10V24P)


**Dimensions – Basic design** Download CAD data → [www.festo.com](http://www.festo.com)

With female thread 1/2, with cover plate

Supply voltage  
10V24

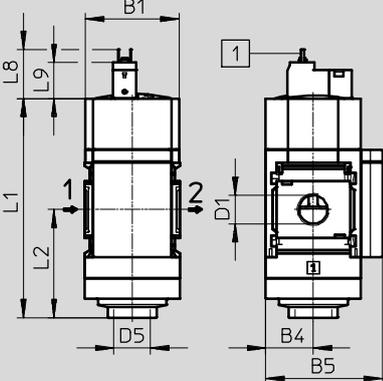


Supply voltage  
10V24P

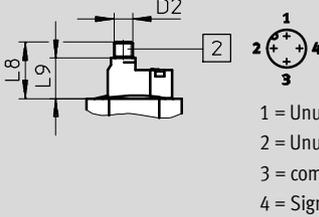

1 = Unused  
2 = Unused  
3 = com (-)  
4 = Signal (+) solenoid 14


With silencer S



- 1 Plug connection to EN 175301-803
- 2 Electrical connection to IEC 61076-2-101, plug M12x1, 2-pin for NEBU-M12

→ Flow direction

Supply voltage 10V24/10V24P



- 7 Non-detenting and detenting manual override (variant 10V24 non-detenting only) at the pilot solenoid valve

Type	B1	B4	B5	D1	D2	D5	L1	L2	L4
MS6-SV-C	62	31	76	G1/2	M12x1	G3/4	144	71	128

Type	L8		L9	
	10V24	10V24P	10V24	10V24P
MS6-SV-C	33	37	24	26

-||- Note: This product conforms to ISO 1179-1 and to ISO 228-1


# Soft-start and quick exhaust valves MS6-SV-C, MS series

Technical data

Dimensions – Pressure gauge/pressure gauge alternatives Download CAD data → [www.festo.com](http://www.festo.com)

Integrated MS pressure gauge with standard scale AG or red/green scale RG, display unit [bar]

Adapter plate A4 for EN pressure gauge 1/4, without pressure gauge

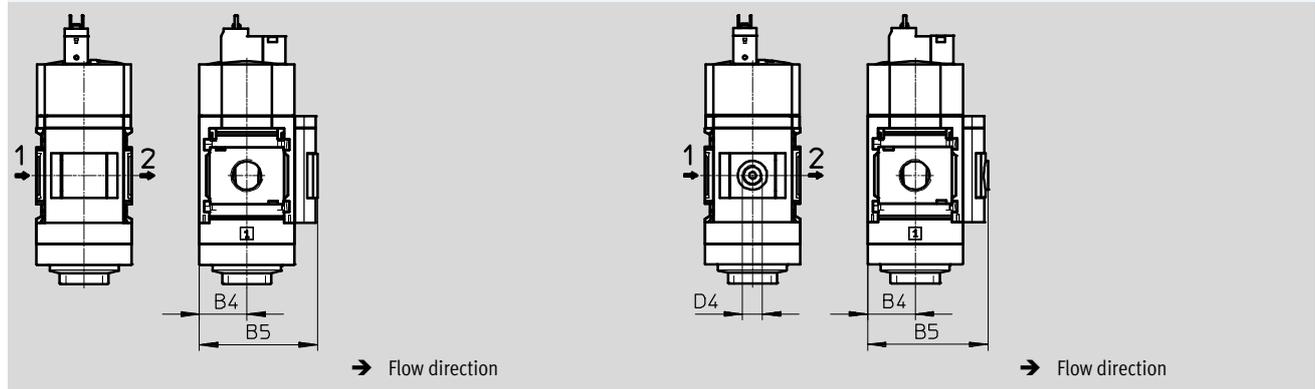


Type	B4	B5	D4
MS6-SV-...-AG	31	77	-
MS6-SV-...-RG	31	78.5	-
MS6-SV-...-A4	31	78.5	G1/4

• | • Note: This product conforms to ISO 1179-1 and to ISO 228-1

# Soft-start and quick exhaust valves MS6-SV-C, MS series

Technical data

**Dimensions – Pressure gauge/pressure gauge alternatives** Download CAD data → [www.festo.com](http://www.festo.com)  
 Pressure sensor with LCD display AD1 ... AD4 Technical data → Internet: sde1

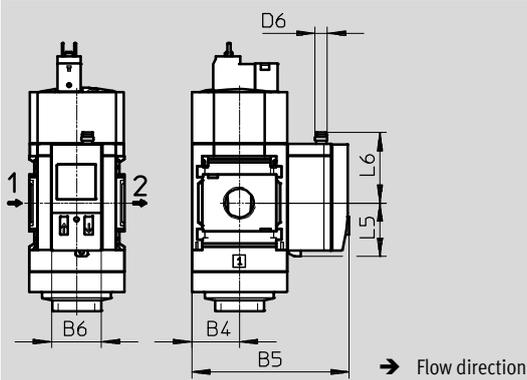


Variant AD1:  
SDE1-D10-G2-MS-L-P1-M8 with 3-pin plug M8x1, 1 switching output PNP

Variant AD2:  
SDE1-D10-G2-MS-L-N1-M8 with 3-pin plug M8x1, 1 switching output NPN

Variant AD3:  
SDE1-D10-G2-MS-L-PI-M12 with 4-pin plug M12x1, 1 switching output PNP and 4 ... 20 mA analogue

Variant AD4:  
SDE1-D10-G2-MS-L-NI-M12 with 4-pin plug M12x1, 1 switching output NPN and 4 ... 20 mA analogue

**Pressure sensor with operational status indicator AD7 ... AD10** Technical data → Internet: sde5

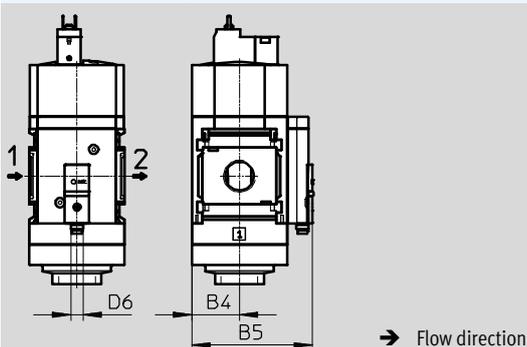

Variant AD7:  
SDE5-D10-O-...-P-M8 with 3-pin plug M8x1, threshold value comparator, 1 switching output PNP, N/O contact

Variant AD8:  
SDE5-D10-C-...-P-M8 with 3-pin plug M8x1, threshold value comparator, 1 switching output PNP, N/C contact

Variant AD9:  
SDE5-D10-O3-...-P-M8 with 3-pin plug M8x1, window comparator, 1 switching output PNP, N/O contact

Variant AD10:  
SDE5-D10-C3-...-P-M8 with 3-pin plug M8x1, window comparator, 1 switching output PNP, N/C contact

Type	B4	B5	B6	D6	L5	L6
MS6-SV-...-AD1/AD2	31	102	32.3	M8x1	35.1	46.7
MS6-SV-...-AD3/AD4				M12x1		55.8
MS6-SV-...-AD7/AD8/AD9/AD10	31	79	-	M8x1	-	-

## ★ Core product range

Ordering data		
Size	Connection	With silencer
		Part No. Type
Cover plate		
MS6	G1/2	★ 8001469 MS6-SV-1/2-C-10V24-S

Festo core product range ★ Ready for dispatch from the Festo factory in 24 hours  
 ☆ Ready for dispatch in 5 days maximum from stock

# Soft-start and quick exhaust valves MS6-SV-C, MS series



Ordering data – Modular products

**M** Mandatory data →

Module No.	Series	Size	Function	Pneumatic connection	Performance level	Supply voltage
548713	MS	6	SV	1/2, AG..., AQ...	C	10V24, 10V24P
<b>Ordering example</b>						
<b>548713</b>	<b>MS</b>	<b>6</b>	<b>- SV</b>	<b>- AGB</b>	<b>- C</b>	<b>- 10V24</b>

**Ordering table**

Grid dimension	[mm]	62	Condi- tions	Code	Enter code
<b>M</b> Module No.		<b>548713</b>			
Series		Standard		<b>MS</b>	MS
Size		6		<b>6</b>	6
Function		Soft-start and quick exhaust valve		<b>-SV</b>	-SV
Pneumatic connection		Female thread G1/2		<b>-1/2</b>	
		Connecting plate G1/4		<b>-AGB</b>	
		Connecting plate G3/8		<b>-AGC</b>	
		Connecting plate G1/2		<b>-AGD</b>	
		Connecting plate G3/4		<b>-AGE</b>	
		Connecting plate NPT1/4		<b>-AQN</b>	
		Connecting plate NPT3/8		<b>-AQP</b>	
		Connecting plate NPT1/2		<b>-AQR</b>	
		Connecting plate NPT3/4		<b>-AQS</b>	
Performance level		Category 1, 1-channel, to EN ISO 13849-1		<b>-C</b>	-C
Supply voltage		24 V DC (pin allocation to EN 175301), 3 ... 10 bar		<b>-10V24</b>	
		24 V DC, M12 to IEC 61076-2-101, 3 ... 10 bar		<b>-10V24P</b>	

Transfer order code

<b>548713</b>	<b>MS</b>	<b>6</b>	<b>- SV</b>	<b>-</b>	<b>C</b>	<b>-</b>
---------------	-----------	----------	-------------	----------	----------	----------

# Soft-start and quick exhaust valves MS6-SV-C, MS series

Ordering data – Modular products

Options					
Silencer	Pressure gauge/ pressure gauge alternatives	Alternative pressure gauge scale	Type of mounting	Tamper protection	Flow direction
S	AG, A4, RG, AD1 ... AD4, AD7 ... AD10	PSI, MPA	WP, WPM, WPB, WB	MK	Z
- S	- AG	-	- WP	-	-

Ordering table					
Grid dimension	[mm]	62	Condi- tions	Code	Enter code
0 Silencer		Silencer		-S	
Pressure gauge/pressure gauge alternatives		MS pressure gauge	1	-AG	
		Adapter plate for EN pressure gauge 1/4, without pressure gauge		-A4	
		Integrated pressure gauge, red/green scale	1	-RG	
		Pressure sensor with LCD display, plug M8, 1 switching output PNP, 3-pin	2	-AD1	
		Pressure sensor with LCD display, plug M8, 1 switching output NPN, 3-pin	2	-AD2	
		Pressure sensor with LCD display, plug M12, 1 switching output PNP, 4-pin, analogue output 4 ... 20 mA	2	-AD3	
		Pressure sensor with LCD display, plug M12, 1 switching output NPN, 4-pin, analogue output 4 ... 20 mA	2	-AD4	
		Pressure sensor with operational status indicator, plug M8, threshold value comparator, PNP, N/O contact	2	-AD7	
		Pressure sensor with operational status indicator, plug M8, threshold value comparator, PNP, N/C contact	2	-AD8	
		Pressure sensor with operational status indicator, plug M8, window comparator, PNP, N/O contact	2	-AD9	
		Pressure sensor with operational status indicator, plug M8, window comparator, PNP, N/C contact	2	-AD10	
	Alternative pressure gauge scale		psi	3	-PSI
		MPa	3	-MPA	
Type of mounting		Mounting bracket standard design		-WP	
		Mounting bracket for attaching the service units	4	-WPM	
		Mounting bracket for large wall gap		-WPB	
		Mounting bracket centrally at rear (wall mounting top and bottom), connecting plates not required		-WB	
Tamper protection		Complete (manual override at soft-start/quick exhaust valve locked, adjusting screw locked, manual override at pilot solenoid valve locked (only with supply voltage 10V24, 10V24P))		-MK	
Flow direction		Flow direction from right to left		-Z	

- 1 AG, RG Pressure gauge scale in bar
- 2 AD1 ... AD4, AD7 ... AD10  
Measuring range max. 10 bar

- 3 PSI, MPA Only in combination with pressure gauge AG or RG.  
With pressure gauge RG: PSI scale serves only as an auxiliary scale (inner scale), outer scale in bar
- 4 WPM Only with connecting plate AGB, AGC, AGD, AGE, AQN, AQP, AQR or AQS


Transfer order code

-  -  -  -  -  -

# Soft-start and quick exhaust valves MS6-SV-D, MS series

Peripherals overview

## Soft-start and quick exhaust valve MS6-SV-D

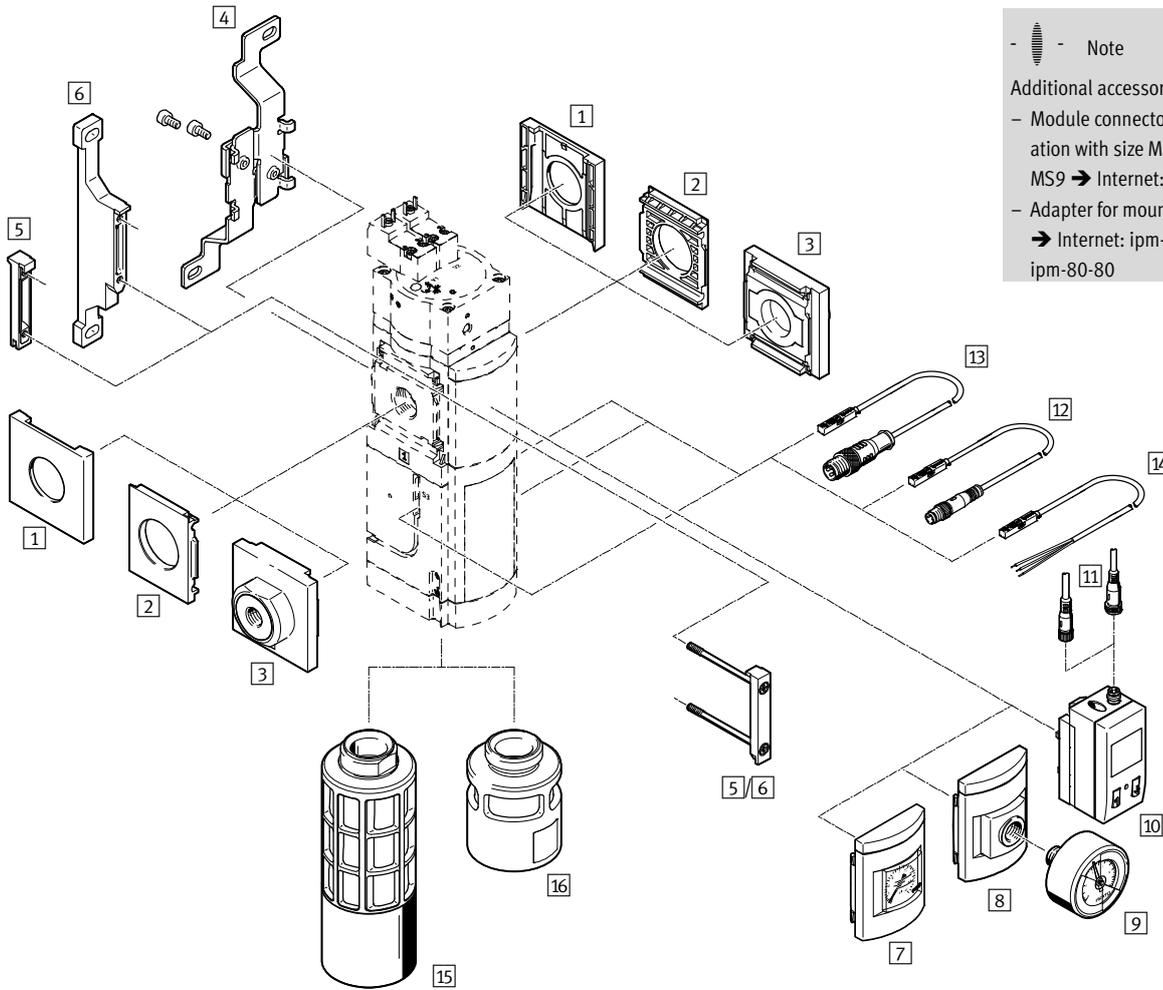


 Note

Additional accessories:

- Module connector for combination with size MS4/MS6 or size MS9 → Internet: amv, rmv, armv
- Adapter for mounting on profiles → Internet: ipm-80, ipm-40-80, ipm-80-80

Supply voltage  
10V24

Supply voltage  
10V24P

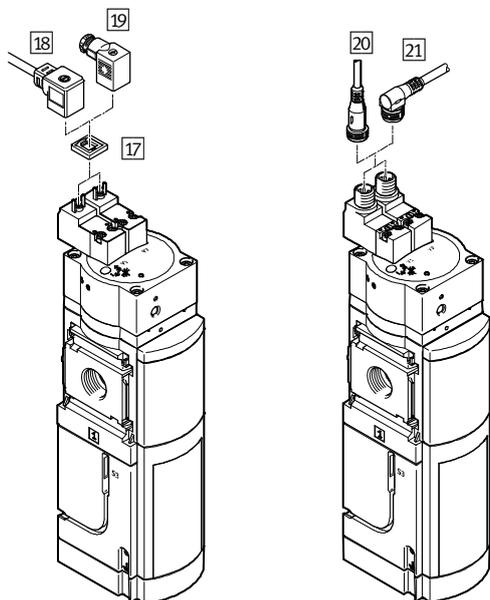

## Soft-start and quick exhaust valves MS6-SV-D, MS series

Peripherals overview

Mounting components and accessories						
		Individual device		Combination		→ Page/Internet
		Without connecting plate	With connecting plate	Without connecting plate	With connecting plate	
1	Cover cap MS6-END	-	-	■	-	ms6-end
2	Mounting plate MS6-AEND	■ <sup>1)</sup>	-	■ <sup>1)</sup>	-	ms6-aend
3	Connecting plate kit MS6-AG...	-	■ <sup>1)</sup>	-	■ <sup>1)</sup>	ms6-ag
	Connecting plate kit MS6-AQ...	-	■ <sup>1)</sup>	-	■ <sup>1)</sup>	ms6-aq
4	Mounting bracket MS6-WB	■	■	-	-	ms6-wb
5	Module connector MS6-MV	-	■	■	■	ms6-mv
6	Mounting bracket MS6-WP	■	■	■	■	ms6-wp
	Mounting bracket (not shown) MS6-WPB/WPE/WPM	■	■	■	■	ms6-wp
7	MS pressure gauge AG/RG	■	■	■	■	28
8	Adapter for EN pressure gauge 1/4 A4	■	■	■	■	28
9	Pressure gauge MA	■	■	■	■	59
10	Pressure sensor with LCD display AD1 ... AD4	■	■	■	■	28
11	Connecting cable NEBU-M8...-LE3/NEBU-M12...-LE4	■	■	■	■	59
12	Proximity sensor 2M8/S3, SMT-8M-A...-M8D	■	■	■	■	28, 58
13	Proximity sensor 2M12/S3, SMT-8M-A...-M12	■	■	■	■	28, 58
14	Proximity sensor 2OE/S3, SMT-8M-A...-OE	■	■	■	■	28, 58
15	Pneumatic Silencer SO, UOS-1	■	■	■	■	28, 56
16	Pneumatic Silencer UOS-1-LF	■	■	■	■	56
17	Illuminating seal MEB-LD	■	■	■	■	59
18	Plug socket with cable KMEB	■	■	■	■	58
19	Plug socket MSSD-EB	■	■	■	■	58
20	Connecting cable NEBU-M12G5	■	■	■	■	59
21	Connecting cable NEBU-M12W5	■	■	■	■	59

1) Module connector MS6-MV<sup>5)</sup> or mounting bracket MS6-WP/WPB/WPE/WPM<sup>6)</sup> is required for mounting.

## Soft-start and quick exhaust valves MS6-SV-D, MS series

Type codes

MS 6 - SV - 1/2 - D - 10V24 - 20E - SO - AG

Series	
MS	Standard service unit
Size	
6	Grid dimension 62 mm
Service function	
SV	Soft-start and quick exhaust valve
Pneumatic connection	
1/2	Female thread G1/2
Performance Level	
D	Category 3, 2-channel, to EN ISO 13849-1
Supply voltage	
10V24	24 V DC (connection to EN 175301)
10V24P	24 V DC, M12 to IEC 61076-2-101
Connection technology	
2M8	2 proximity sensors SMT (cable with plug connector M8x1, 3-pin, cable length 0.3 m)
2M12	2 proximity sensors SMT (cable with plug connector M12x1, 3-pin, cable length 0.3 m)
20E	2 proximity sensors SMT (cable with open end, cable length 5 m)
Pneumatic silencer	
	Without pneumatic silencer
SO	Pneumatic silencer open
Pressure gauge/pressure gauge alternatives	
	Cover plate
AG	MS pressure gauge


### Additional variants can be ordered using the modular product system → 28

- Pneumatic connection
- Extended sensing
- Pressure gauge/pressure gauge alternatives
- Alternative pressure gauge scale
- Type of mounting
- UL certification
- Flow direction

# Soft-start and quick exhaust valves MS6-SV-D, MS series

Technical data

**Function**



-  - Flow rate  
4300 l/min
-  - Temperature range  
-10 ... +50 °C
-  - Operating pressure  
3.5 ... 10 bar
-  - [www.festo.com](http://www.festo.com)



The electropneumatic soft-start and quick exhaust valve is used to reduce pressure quickly and safely and to build up pressure gradually in industrial pneumatic piping systems and terminal equipment.

The MS6-SV-D has two safety functions:

- pressure release
- protection from unexpected start-up (non-switching)

The MS6-SV-D has a 2-channel structure, i.e. it has two internal 2-way

valves which can be controlled separately by pilot valves (V1 and V2) situated on the cover. These valves are actuated when both coils are energised simultaneously; this changes the MS6-SV-D from the normal position to the switching position. The outlet pressure p2 rises slowly in accordance with the throttle setting. The main seat opens when the switch-through pressure is reached. The normal position is achieved by switching off both coils. Two proximity sensors (S1 and S2)

secured on the housing monitor the directional control valves. A further proximity sensor (S3) can optionally be added to monitor the soft-start valve.

The MS6-SV-D can achieve various categories and safety levels to EN ISO 13849-1 depending on how the directional control valves are monitored.

Where there is appropriate integration into the control chain as well as

appropriate linking of the signals for initial position sensing with the signals for activation (plausibility checking):

- Performance Level d/category 3 to EN ISO 13849-1 and EN ISO 13849-2 can be achieved when using sensors S1 and S2 and
- Performance Level e/category 4 to EN ISO 13849-1 and EN ISO 13849-2 can be achieved when using sensors S1, S2 and S3.

 **Note**  
To avoid back pressures, it is recommended that the device be operated together with the silencer UOS-1. The silencer can be ordered via the modular product system (SO → 28) or as an accessory (UOS-1 → 56).

 **Note**  
Only devices that do not impair pressure release may be positioned downstream of the MS6-SV-...-D. The MS6-SV-...-D is not permitted for use as a press safety valve.

- Conforms to standard IEC 61508
- Switching time delay adjustable via a flow control valve for gradual pressure build-up; main seat opens at approx. 50% of operating pressure
- Optional pressure sensor

Safety characteristics	
Conforms to standard	EN ISO 13849-1 and EN ISO 13849-2
Safety function	Venting
	Protection from unexpected start-up
Performance Level (PL)	Venting: up to category 3, PL d with sensing by S1 and S2
	Venting: up to category 4, PL e with sensing by S1, S2 and S3
Safety integrity level (SIL)	Venting: SIL 3
Note on forced dynamisation	Switching frequency min. 1/month
CE marking (see declaration of conformity) <sup>1)</sup>	To EC Machinery Directive
	To EU EMC Directive
Shock resistance	Shock test with severity level 2 according to FN 942017-5 and EN 60068-2-27
Vibration resistance	Transport application test with severity level 2 according to FN 942017-4 and EN 60068-2-6

 **Note**  
**on forced dynamisation: switching frequency min. 1/month**  
The mechanical system is not tested in the controlled (i.e. pressurised) state. If the process-related switching frequency (safe venting) is less than once a month, the machine operator must carry out a forced switch-off.

1) Additional information [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

# Soft-start and quick exhaust valves MS6-SV-D, MS series


Technical data

Switching logic	Voltage at the pilot valve		Switching position Proximity sensor			Status
	V1	V2	S1	S2	S3	
In the normal position (completely exhausted MS6-SV-D), the pilot valves V1 and V2 are not actuated. If both pilot valves are actuated, the MS6-SV-D switches first into switching position 1 and then, when the switch-through pressure is reached, automatically into switching position 2.	0 V	0 V	1	1	1	<b>Normal position</b> Pneumatic port 1 closed, passage from pneumatic port 2 to 3 open
	24 V	0 V	0	1	1	<b>Normal position</b> Pneumatic port 1 closed, passage from pneumatic port 2 to 3 open
	0 V	24 V	1	0	1	<b>Normal position</b> Reduced flow through flow control valve from pneumatic port 1 to 2, passage from pneumatic port 2 to 3 open
	24 V	24 V	0	0	1	<b>Switching element position 1</b> Reduced flow through flow control valve from pneumatic port 1 to 2, passage from pneumatic port 2 to 3 closed
	24 V	24 V	0	0	0	<b>Switching position 2</b> Full flow from pneumatic port 1 to 2, passage from pneumatic port 2 to 3 closed

Proximity sensor response times <sup>1)</sup>		
Proximity sensor	Switching on	Switching off
S1	Edge change max. 4 s after voltage signal at V1.	Edge change max. 4 s after voltage drop at V1.
S2	Edge change max. 4 s after voltage signal at V2.	Edge change max. 4 s after voltage drop at V2.
S3	Edge change after voltage signal at V1 and V2. Dependent on operating pressure p1, throttle position and system volume p2	Edge change max. 5 s after voltage drop at V1 and V2. Dependent on system volume at p2.

1) When the proximity sensors undergo an edge change, bounce can occur. This bounce can be ignored by taking the response times into account. The maximum specified response times must be considered in the diagnostics. The response times are normally shorter.

### Example circuit

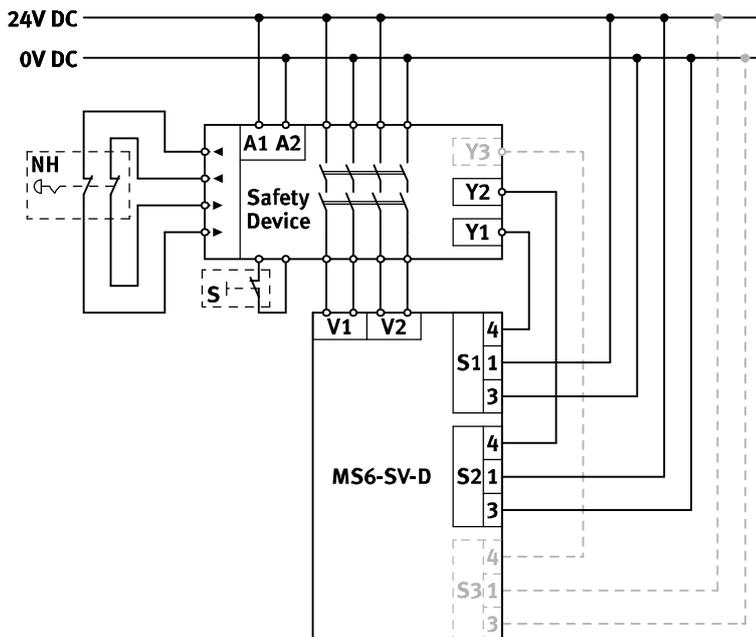


- A1, A2: Supply voltage
- S1: Proximity sensor S1
- S2: Proximity sensor S2
- S3: Proximity sensor S3
- NH: Emergency stop (input circuit)
- Safety device: Safety switching device or safety PLC
- V1: Coil connection, pilot valve V1
- V2: Coil connection, pilot valve V2
- Y1: Diagnostic input 1
- Y2: Diagnostic input 2
- Y3: Diagnostic input 3
- S: Monitored start (start circuit)

# Soft-start and quick exhaust valves MS6-SV-D, MS series

Technical data

## Switch-through pressure

Pressure p as a function of time t

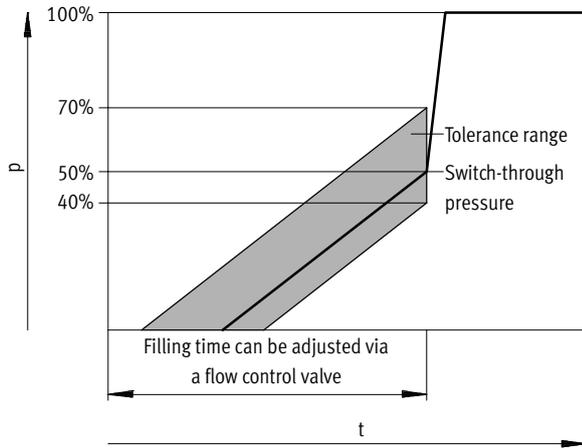

 Note

The +20%/−10% switch-through pressure tolerance refers to the operating pressure p<sub>1</sub>.  
 Example: A switch-through pressure from 1.6 bar to 2.8 bar is permissible at an operating pressure of 4 bar.

## General technical data

Pneumatic port 1, 2	
Female thread	G1/2
Connecting plate AG...	G1/4, G3/8, G1/2 or G3/4
Connecting plate AQ...	NPT1/4, NPT3/8, NPT1/2 or NPT3/4
Pneumatic port 3	G1
Actuation type	Electric
Design	Piston seat
Type of mounting	Via accessories In-line installation
Mounting position	Any
Pressure indicator	Via pressure sensor for displaying output pressure via LCD display and electrical output Via pressure gauge for displaying output pressure Via pressure gauge with red/green scale for displaying output pressure G1/4 prepared
Position sensing principle	Magnetic piston principle
Valve function	3/2-way valve, closed, single solenoid Soft-start function, adjustable
Non-overlapping	No
Exhaust function	No flow control
Manual override	None
Reset method	Mechanical spring
Type of control	Piloted
Pilot air supply	Internal
Sealing principle	Soft

 Note: This product conforms to ISO 1179-1 and to ISO 228-1

## Flow rate characteristics

Pneumatic connection	Female thread G1/2
Standard nominal flow rate q <sub>N</sub> <sup>1)</sup> [l/min]	
In main flow direction 1 → 2	4300
Standard flow rate q <sub>N</sub> [l/min], p <sub>2</sub> = 6 bar	
In venting direction 2 → 3	9000 <sup>2)</sup>
C value [l/s*min]	
In main flow direction 1 → 2	19.3
b value	
In main flow direction 1 → 2	0.21

1) Measured at p<sub>1</sub> = 6 bar and p<sub>2</sub> = 5 bar, Δp = 1 bar  
 2) Measured with respect to atmosphere with silencer S

## Soft-start and quick exhaust valves MS6-SV-D, MS series

Technical data

Electrical data		
Pilot valve		
Coil characteristics		24 V DC: 1.8 W; permissible voltage fluctuations -15%/+10%
Electrical connection	10V24	2 x plug connectors, 2-pin, to EN 175301-803, type C
	10V24P	2 x M12x1, 2-pin, to IEC 61076-2-101
Degree of protection		IP65 with plug socket
Duty cycle	[%]	100
Max. switching frequency	[Hz]	0.5
Switching time off	[ms]	40
Switching time on	[ms]	130
Proximity sensor		
Nominal operating voltage	[V DC]	24
Electrical connection, proximity sensor	2M8	2 x cables with plug connector M8x1, 3-pin, rotatable thread, cable length 0.3 m
	2M12	2 x cables with plug connector M12x1, 3-pin, rotatable thread, cable length 0.3 m
	2OE	2 x cable with open end, 3-wire, cable length 5 m
	2M8 + S3	3 x cables with plug connector M8x1, 3-pin, rotatable thread, cable length 0.3 m
	2M12 + S3	3 x cables with plug connector M12x1, 3-pin, rotatable thread, cable length 0.3 m
	2OE + S3	3 x cable with open end, 3-wire, cable length 5 m
Switching element function		N/O contact
Measuring principle		Magneto-resistive
Signal status display		LED and switching outputs
Switching output		PNP

Operating and environmental conditions		
Operating pressure	[bar]	3.5 ... 10
Operating medium		Compressed air according to ISO 8573-1:2010 [7:4:4]
Note on operating/pilot medium		Lubricated operation possible (in which case lubricated operation will always be required)
Ambient temperature	[°C]	-10 ... +50 (0 ... +50) <sup>1)</sup>
Temperature of medium	[°C]	-10 ... +50 (0 ... +50) <sup>1)</sup>
Storage temperature	[°C]	-10 ... +50 (0 ... +50) <sup>1)</sup>
Corrosion resistance class CRC <sup>2)</sup>		2
Noise level	[dB(A)]	75 (with silencer UOS-1)
CE marking (see declaration of conformity) <sup>4)</sup>		To EU EMC Directive <sup>3)</sup>
		To EU Machinery Directive
Certification (variant UL1)		c UL us - Recognized (OL)
Certification		RCM Mark

1) With pressure sensor AD...

2) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

3) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

4) Additional information [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

Weight [g]	
Soft-start/quick exhaust valve	1900
Soft-start/quick exhaust valve with silencer UOS-1	2110

Materials	
Housing	Die-cast aluminium
Piston rod	High-alloy stainless steel
Seals	NBR
Note on materials	RoHS-compliant

# Soft-start and quick exhaust valves MS6-SV-D, MS series


Technical data

## Dimensions – Basic design

Download CAD data → [www.festo.com](http://www.festo.com)

With supply voltage 10V24, with female thread 1/2, with cover plate

With supply voltage 10V24P, with female thread 1/2, with cover plate

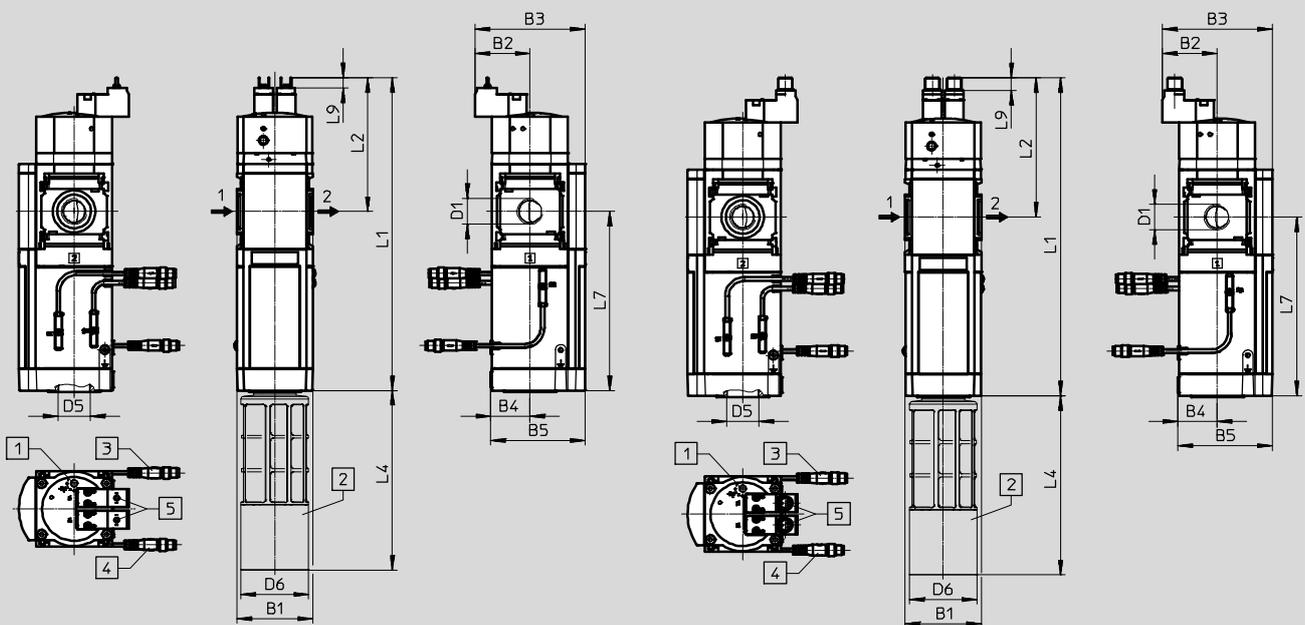

- 1 = Unused
- 2 = Unused
- 3 = com (-)
- 4 = Signal (+) solenoid 14

- 1 Regulating screw for flow control valve
  - 2 Silencer UOS-1
  - 3 Extended sensing, variant S3: additional third proximity sensor SMT, port depends on connection technology chosen 4
  - 4 Connection technology,
    - variant 2M8: 2 proximity sensors SMT with cable (plug connector M8x1, 3-pin, rotatable thread, cable length 0.3 m)
    - variant 2M12: 2 proximity sensors SMT with cable (plug connector M12x1, 3-pin, rotatable thread, cable length 0.3 m)
    - variant 20E: 2 proximity sensors SMT with cable (open end, 3-wire, cable length 5 m)
  - 5 Supply voltage,
    - variant 10V24: Electrical connection to EN 175301-803, 2 x plug connectors, 2-pin, type C
    - variant 10V24P: Electrical connection to IEC 61076-2-101, 2 x plug connectors M12x1, 2-pin for NEBU-M12
- Flow direction

Type	B1	B2	B3	B4	B5	D1	D5	D6 ∅	L1	L2	L4	L7	L9
MS6-SV-1/2-D-10V24	62	45	90	31	76	G1/2	G1	55	257	110	147	147	9
MS6-SV-1/2-D-10V24P									262	115			11

- | - Note: This product conforms to ISO 1179-1 and to ISO 228-1

# Soft-start and quick exhaust valves MS6-SV-D, MS series


Technical data

**Dimensions – Pressure gauge/pressure gauge alternatives**

Download CAD data → [www.festo.com](http://www.festo.com)

Integrated MS pressure gauge with standard scale AG or red/green scale RG, display unit [bar]

Adapter A4 for EN pressure gauge 1/4, without pressure gauge

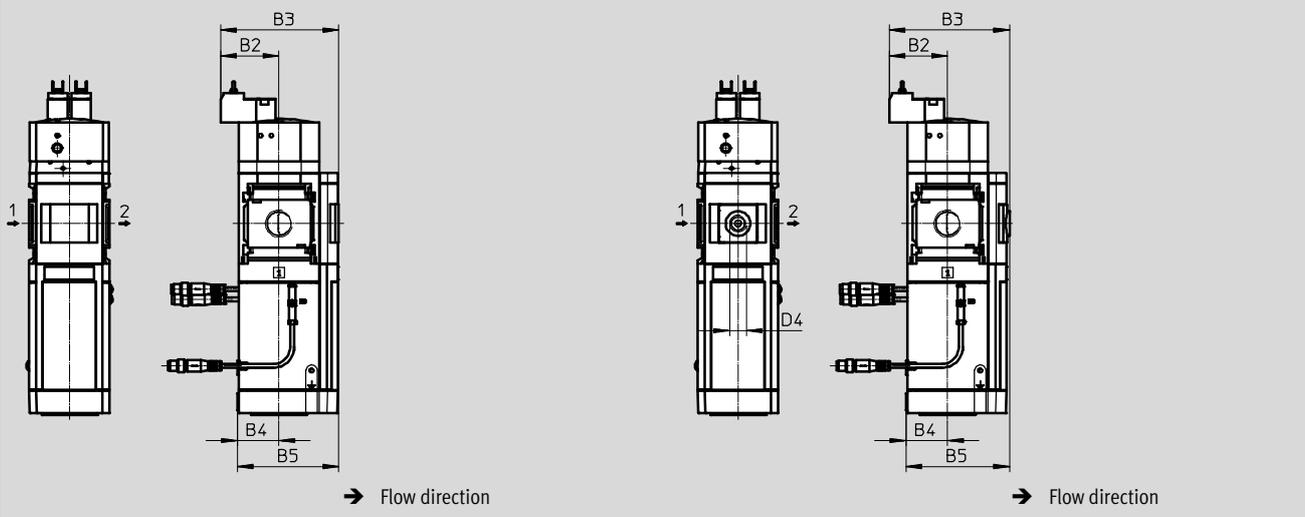

Type	B2	B3	B4	B5	D4
MS6-SV-...-D-...-AG	44	90	31	77	-
MS6-SV-...-D-...-RG	44	91.5	31	78.5	-
MS6-SV-...-D-...-A4	44	91.5	31	78.5	G1/4


Note: This product conforms to ISO 1179-1 and to ISO 228-1

**Dimensions – Pressure gauge/pressure gauge alternatives**

Download CAD data → [www.festo.com](http://www.festo.com)

Pressure sensor with LCD display AD1 ... AD4

Technical data → Internet: [sde1](http://sde1)

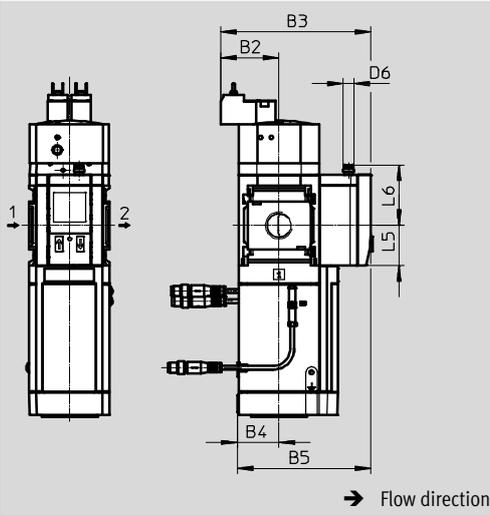

Variant AD1:  
SDE1-D10-G2-MS-L-P1-M8 with  
3-pin plug connector M8x1,  
1 switching output PNP

Variant AD2:  
SDE1-D10-G2-MS-L-N1-M8 with  
3-pin plug connector M8x1,  
1 switching output NPN

Variant AD3:  
SDE1-D10-G2-MS-L-PI-M12 with  
4-pin plug connector M12x1,  
1 switching output PNP and  
4 ... 20 mA analogue

Variant AD4:  
SDE1-D10-G2-MS-L-NI-M12 with  
4-pin plug connector M12x1,  
1 switching output NPN and  
4 ... 20 mA analogue

Type	B2	B3	B4	B5	D6	L5	L6
MS6-SV-...-D-...-AD1/AD2	44	116	31	103	M8x1	31.2	46.8
MS6-SV-...-D-...-AD3/AD4					M12x1		55.8

Note: This product conforms to ISO 1179-1 and to ISO 228-1

## Soft-start and quick exhaust valves MS6-SV-D, MS series

Technical data

Ordering data					
Size	Port	Without pneumatic silencer, with cover plate		With silencer and MS pressure gauge with standard scale, display unit [bar]	
		Part No.	Type	Part No.	Type
Electrical connection to EN 175301-803 (2 x plug connectors, 2-pin, type C), 2 proximity sensors SMT with cable (plug connector M8x1, 3-pin, rotatable thread, cable length 0.3 m)					
MS6	G1/2	<b>8038489</b>	<b>MS6-SV-1/2-D-10V24-2M8</b>	<b>8038490</b>	<b>MS6-SV-1/2-D-10V24-2M8-SO-AG</b>
Electrical connection to IEC 61076-2-101 (2 x plug connectors M12x1, 2-pin for NEBU-M12), 2 proximity sensors SMT with cable (plug connector M12x1, 3-pin, rotatable thread, cable length 0.3 m)					
MS6	G1/2	–		<b>8038491</b>	<b>MS6-SV-1/2-D-10V24P-2M12-SO-AG</b>
Electrical connection to EN 175301-803 (2 x plug connectors, 2-pin, type C), 2 proximity sensors SMT with cable (open end, 3-wire, cable length 5 m)					
MS6	G1/2	–		<b>8038492</b>	<b>MS6-SV-1/2-D-10V24-20E-SO-AG</b>

## Soft-start and quick exhaust valves MS6-SV-D, MS series

Ordering data – Modular products

M Mandatory data →							
Module no.	Series	Size	Function	Pneumatic connection	Performance Level	Supply voltage	Connection technology
548713	MS	6	SV	1/2, AG..., AQ...	D	10V24, 10V24P	2M8, 2M12, 20E
<b>Ordering example</b>							
<b>548713</b>	<b>MS</b>	<b>6</b>	<b>- SV</b>	<b>- AGB</b>	<b>- D</b>	<b>- 10V24</b>	<b>- 20E</b>

Ordering table					
Grid dimension	[mm]	62	Conditions	Code	Entry code
M	Module no.	<b>548713</b>			
	Series	Standard		<b>MS</b>	MS
	Size	6		<b>6</b>	6
	Function	Soft-start and quick exhaust valve		<b>-SV</b>	-SV
	Pneumatic connection	Female thread G1/2		<b>-1/2</b>	
		Connecting plate G1/4		<b>-AGB</b>	
		Connecting plate G3/8		<b>-AGC</b>	
		Connecting plate G1/2		<b>-AGD</b>	
		Connecting plate G3/4		<b>-AGE</b>	
		Connecting plate NPT1/4		<b>-AQN</b>	
		Connecting plate NPT3/8		<b>-AQP</b>	
		Connecting plate NPT1/2		<b>-AQR</b>	
		Connecting plate NPT3/4		<b>-AQS</b>	
		Performance Level	Category 3, 2-channel, to EN ISO 13849-1		<b>-D</b>
	Supply voltage	24 V DC (pin allocation to EN 175301)		<b>-10V24</b>	
		24 V DC, M12 to IEC 61076-2-101		<b>-10V24P</b>	
	Connection technology	2 proximity sensors SMT with cable plug connector M8x1, 3-pin, rotatable thread, cable length 0.3 m)		<b>-2M8</b>	
		2 proximity sensors SMT with cable (plug connector M12x1, 3-pin, rotatable thread, cable length 0.3 m)		<b>-2M12</b>	
		2 proximity sensors SMT with cable (open end, 3-wire, cable length 5 m)		<b>-20E</b>	

**Transfer order code**

<b>548713</b>	<b>MS</b>	<b>6</b>	<b>- SV</b>	<b>-</b>	<b>D</b>	<b>-</b>	<b>-</b>
---------------	-----------	----------	-------------	----------	----------	----------	----------

# Soft-start and quick exhaust valves MS6-SV-D, MS series

Ordering data – Modular products

Options						
Extended sensing	Silencer	Pressure gauge/pressure gauge alternatives	Alternative pressure gauge scale	Type of mounting	UL certification	Flow direction
S3	S0	AG, A4, RG, AD1 ... AD4	PSI, MPA	WP, WPM, WPB, WB	UL1	Z
- S3	- S0	- AG		- WPB		

Ordering table					
Grid dimension	[mm]	62	Conditions	Code	Entry code
0	Extended sensing	Additional proximity sensor SMT; required to achieve Performance Level e; port depends on connection technology chosen		-S3	
	Silencer	Silencer open		-S0	
	Pressure gauge/pressure gauge alternatives	MS pressure gauge	1	-AG	
		Adapter for EN pressure gauge 1/4, without pressure gauge		-A4	
		Integrated pressure gauge, red/green scale	1	-RG	
		Pressure sensor with LCD display, plug connector M8, 1 switching output PNP, 3-pin		-AD1	
		Pressure sensor with LCD display, plug connector M8, 1 switching output NPN, 3-pin		-AD2	
		Pressure sensor with LCD display, plug connector M12, 1 switching output PNP, 4-pin, analogue output 4 ... 20 mA		-AD3	
		Pressure sensor with LCD display, plug connector M12, 1 switching output NPN, 4-pin, analogue output 4 ... 20 mA		-AD4	
	Alternative pressure gauge scale	psi	2	-PSI	
		MPa	2	-MPA	
	Type of mounting	Mounting bracket standard design		-WP	
		Mounting bracket for attaching the service units	3	-WPM	
		Mounting bracket for large wall gap		-WPB	
		Mounting bracket centrally at rear (wall mounting top and bottom), connecting plates not required		-WB	
	UL certification	cULus, ordinary location for Canada and USA		-UL1	
	Flow direction	Flow direction from right to left		-Z	

- 1 **AG, RG** Pressure gauge scale in bar
- 2 **PSI, MPA** Only in combination with pressure gauge AG or RG.  
With pressure gauge RG: PSI scale serves only as an auxiliary scale (inner scale), outer scale in bar
- 3 **WPM** Only with connecting plates AGB, AGC, AGD, AGE, AQN, AQP, AQR or AQS


Transfer order code

-  -  -  -  -  -  -

# Soft-start and quick exhaust valves MS6-SV-E, MS series

Peripherals overview

## Soft-start and quick exhaust valve MS6-SV-E

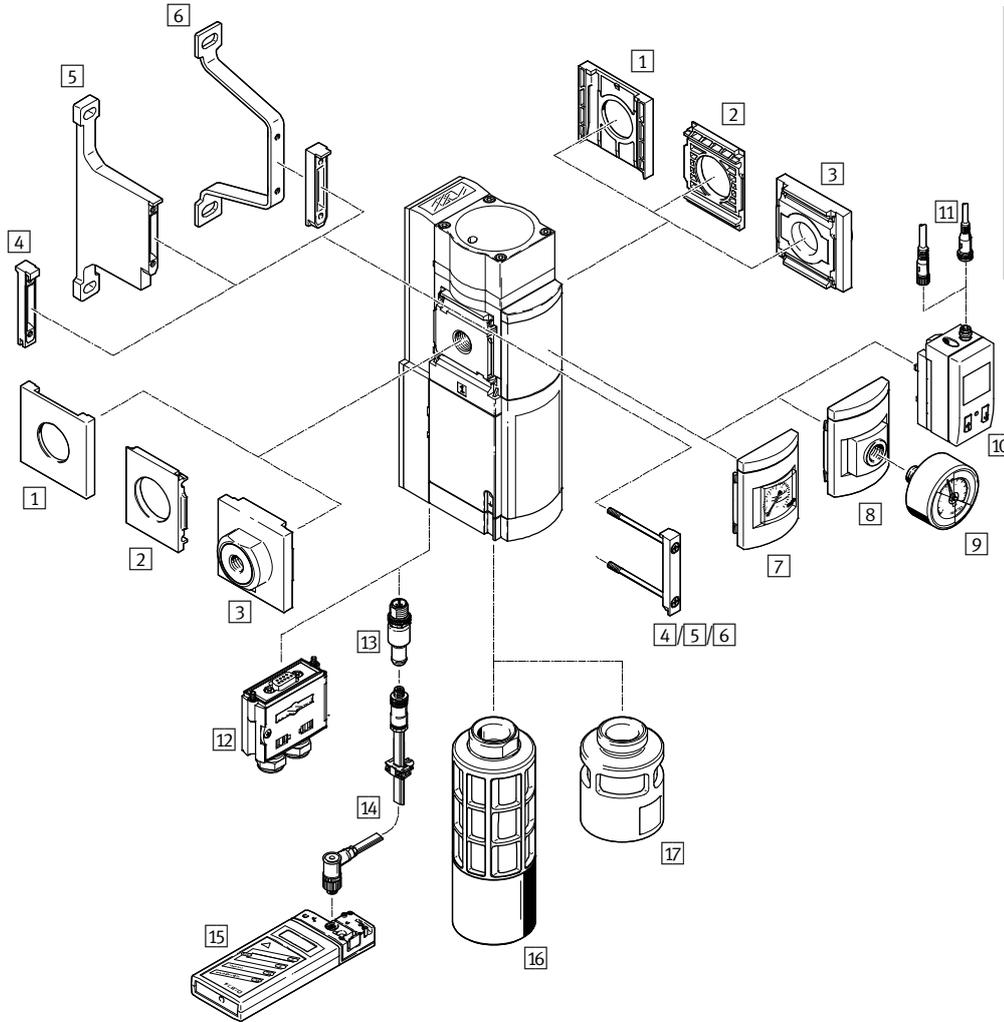

Note

Additional accessories:

- Module connector for combination with size MS4/MS6 or size MS9 → Internet: amv, rmv, armv
- Adapter plate for mounting on profiles → Internet: ipm-80, ipm-40-80, ipm-80-80

## Soft-start and quick exhaust valves MS6-SV-E, MS series

Peripherals overview

Mounting attachments and accessories						
		Individual device		Combination		→ Page/Internet
		Without connect- ing plate	With connecting plate	Without connect- ing plate	With connecting plate	
1	Cover cap MS6-END	-	-	■	-	ms6-end
2	Mounting plate MS6-AEND	■ <sup>1)</sup>	-	■ <sup>1)</sup>	-	ms6-aend
3	Connecting plate-SET MS6-AG...	-	■ <sup>1)</sup>	-	■ <sup>1)</sup>	ms6-ag
	Connecting plate-SET MS6-AQ...	-	■ <sup>1)</sup>	-	■ <sup>1)</sup>	ms6-aq
4	Module connector MS6-MV	-	-	■	■	ms6-mv
5	Mounting bracket MS6-WPB	■	■	■	■	ms6-wpb
6	Mounting bracket MS6-WPE	■	■	■	■	ms6-wpe
7	MS pressure gauge AG/RG	■	■	■	■	42
8	Adapter plate for EN pressure gauge 1/4 A4	■	■	■	■	42
9	Pressure gauge MA	■	■	■	■	59
10	Pressure sensor with LCD display AD1 ... AD4	■	■	■	■	42
11	Connecting cable NEBU-M8...-LE3/NEBU-M12...-LE4	■	■	■	■	59
12	Multi-pin plug socket NECA	■	■	■	■	54
13	AS-i configuration plug CACC	■	■	■	■	57
14	Addressing cable KASI-ADR	■	■	■	■	kasi-asi
15	Addressing device ASI-PRG-ADR	■	■	■	■	asi-prg-adr
16	Silencer UOS-1	■	■	■	■	56
17	Silencer UOS-1-LF	■	■	■	■	56

1) Module connector MS6-MV or mounting bracket MS6-WPB/WPE is required for mounting.

## Soft-start and quick exhaust valves MS6-SV-E, MS series

FESTO

Type codes

		MS	6	-	SV	-	1/2	-	E	-	10V24	-	SO	-	AG
<b>Series</b>															
MS	Standard service unit														
<b>Size</b>															
6	Grid dimension 62 mm														
<b>Service function</b>															
SV	Soft-start and quick exhaust valve														
<b>Pneumatic connection</b>															
1/2	Female thread G1/2														
<b>Performance level</b>															
E	Category 4, 2-channel with self-monitoring, to EN ISO 13849-1														
<b>Supply voltage</b>															
10V24	24 V DC														
ASIS	22 ... 31.6 V DC, AS-i Safety at Work, SPEC3.0 Profile 7.5.5														
<b>Silencer</b>															
	Without silencer														
SO	Open silencer														
<b>Pressure gauge/pressure gauge alternatives</b>															
AG	MS pressure gauge														
AD1	Pressure sensor with LCD display, plug M8, 1 switching output PNP, 3-pin (only with supply voltage 10V24)														


Additional variants can be ordered using the modular product system → 42

- Pneumatic connection
- Pressure gauge/pressure gauge alternatives
- Alternative pressure gauge scale
- Multi-pin plug socket
- Type of mounting
- UL certification
- Flow direction

# Soft-start and quick exhaust valves MS6-SV-E, MS series

Technical data

## Function



- - Flow rate  
4,300 l/min
- - Temperature range  
-10 ... +50 °C
- - Operating pressure  
3.5 ... 10 bar
- - [www.festo.com](http://www.festo.com)



The electro-pneumatic soft-start and quick exhaust valve is used to reduce pressure quickly and reliably and to build up pressure gradually in industrial pneumatic systems and terminals. The device is a self-testing, redundant mechatronic system conforming to the

requirements of EN ISO 13849-1. The safety-related pneumatic protection objective of safe venting is also guaranteed in the event of faults inside the valve (e.g. due to wear, contamination, electronic faults). Thanks to the 2-channel design and its monitoring, the device fulfils controller category 3

and 4 requirements. This enables a performance level of max. "e" to be attained. The device receives the secure enable signals (EN1/EN2) via the electrical connection (multi-pin plug socket NECA Sub-D, 9-pin or AS-i connecting cable). The signals in question come

from commercially available electronic or electromechanical safety switching devices which monitor the protective equipment of the machine (e.g. emergency stop, light curtain, electrical door switch of a protective enclosure, etc.).

**Note**  
The MS6-SV-...-E-10V24 should only be used in combination with the multi-pin plug socket NECA approved for it. The multi-pin plug socket can be ordered via the modular product system (MP... → 42) or as an accessory (NECA → 54).

**Note**  
To avoid back pressures, it is recommended that the device be operated together with the silencer UOS-1. The silencer can be ordered via the modular product system (SO → 42) or as an accessory (UOS-1 → 56).

**Note**  
Only devices that do not impair the pneumatic protective measure – safe venting – may be placed downstream of the MS6-SV-...-E. The MS6-SV-...-E is not permitted for use as a press safety valve.

- Performance level "e"/category 4 according to EN ISO 13849-1
- Conforms to standard IEC 61508
- Switching time delay adjustable via a flow control valve for gradual pressure build-up
- Optional pressure sensor

Safety characteristics		
Type	MS6-SV-...-E-10V24	MS6-SV-...-E-ASIS
Conforms to standard	EN ISO 13849-1	
Safety function	Venting	
	Protection from unexpected start-up	
Performance level (PL)	Venting: up to category 4, PL e	
Safety integrity level (SIL)	Venting: SIL 3	
Note on forced dynamisation	Switching frequency min. 1/month	
Certificate issuing authority <sup>1)</sup>	IFA 1001180	TÜV Nord, Registration no. 44 799 12 556236 000
CE marking (see declaration of conformity) <sup>1)</sup>	To EU Machinery Directive	
	To EU EMC Directive	
Shock resistance	Shock test with severity level 2 according to FN 942017-5 and EN 60068-2-27	
Vibration resistance	Transport application test with severity level 2 according to FN 942017-4 and EN 60068-2-6	

1) Additional information [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

**Note on forced dynamisation: switching frequency min. 1/month**  
The mechanical system is not tested in the controlled (i.e. pressurised) state. If the process-related switching frequency (safe venting) is less than once a month, the machine operator must carry out a forced switch-off.

- Additional functions of MS6-SV-...-E-ASIS:**
- Integrated pressure sensors via AS-i protocol
  - Pressure monitoring (under/over-shooting)

# Soft-start and quick exhaust valves MS6-SV-E, MS series

Technical data



Operational principle of the multi-pin plug socket NECA				
Status of enable signal		Status of MS6-SV-...-E-10V24 with multi-pin plug		
EN1	EN2	NECA-...- MP1	NECA-...- MP3	NECA-...- MP5
0 V	0 V	Unpressurized	MS6-SV-...-E-10V24 goes into the fault mode.	MS6-SV-...-E-10V24 does not go into the fault mode, but remains in the safe, unpressurized status. <b>Note:</b> Cross-circuit detection and error detection/evaluation via external controller necessary.
0 V	24 V	MS6-SV-...-E-10V24 goes into the fault mode.	Pressurized	Pressurized
24 V	24 V	Pressurized	MS6-SV-...-E-10V24 goes into the fault mode.	MS6-SV-...-E-10V24 does not go into the fault mode, but remains in the safe, unpressurized status. <b>Note:</b> Cross-circuit detection and error detection/evaluation via external controller necessary.
24 V	0 V	MS6-SV-...-E-10V24 goes into the fault mode.	Unpressurized	Unpressurized

**MS6-SV-...-E-10V24 with multi-pin plug socket NECA**

NECA-...- MP1

**24 V**

**GND**

– Static enable signals (EN1 = 24 V, EN2 = 24 V).

EN1

EN2

– Clocked enable signals (EN1 = 0 ... 24 V, EN2 = 0 ... 24 V) for cross-circuit detection. Cross-circuit detection with clock signals is in principle carried out by the safety switching device/safety PLC used.

**Note**

Given the fact that clock outputs from different controller manufacturers are not standardised, their usability must be checked in each case. If the clock pulse is outside of the described limits, this is recognised by the MS6-SV-...-E-10V24 as an error and a safe switch-off is performed.

EN1

EN2

# Soft-start and quick exhaust valves MS6-SV-E, MS series

Technical data

<b>MS6-SV...-E-10V24 with multi-pin plug socket NECA</b>	
NECA...- MP3	
	<p>-  Note</p> <p>The multi-pin plug socket NECA-S1G9-P9-MP3 is intended for conventional circuitry with electromechanical safety relays. If problems arise in use with bipolar semiconductor outputs, use the multi-pin plug socket NECA-S1G9-P9-MP5.</p>
<ul style="list-style-type: none"> <li>- Static enable signals with opposite potentials.</li> <li>- The time delay of the level change of the enable signals is monitored.</li> <li>- Behaviour on detection of a cross circuit:                             <ul style="list-style-type: none"> <li>- MS6-SV...-E-10V24 in the exhausted status: remains in the safe status and goes into the fault mode.</li> <li>- MS6-SV...-E-10V24 in the pressurized status: goes into the safe status and goes into the fault mode.</li> </ul> </li> </ul>	
NECA...- MP5	
	<p>-  Note</p> <p>A cross circuit between the enable signals (EN1/EN2) is not detected and does not cause an error response. The system can be pressurized only when the enable signals are applied correctly.</p>
<ul style="list-style-type: none"> <li>- Static enable signals with opposite potentials.</li> <li>- The time delay of the level change of the enable signals is not monitored.</li> <li>- Behaviour on detection of a cross circuit (through upstream safety switching device/safety PLC):                             <ul style="list-style-type: none"> <li>- MS6-SV...-E-10V24 in the exhausted status: remains in the safe status and does not go into the fault mode.</li> <li>- MS6-SV...-E-10V24 in the pressurized status: goes into the safe status and does not go into the fault mode.</li> </ul> </li> <li>- Enable signal are galvanically separated from the supply voltage.</li> </ul>	<p>-  Note</p> <p>The time delay between EN1 and EN2 must be automatically determined. The duration of the delay is not evaluated.</p>

# Soft-start and quick exhaust valves MS6-SV-E, MS series

Technical data

FESTO

## MS6-SV-...-E-ASIS in the actuator-sensor interface (AS-i)

The actuator-sensor interface (AS-i) is a system for networking sensors and actuators on the lowest level of the automation hierarchy. It is a non-proprietary, open bus system and enables transfer of data and energy on just one line. This simple method permits an efficient configuration with simultaneously reliable performance. The network topology of the AS-i system can be expanded as desired without any difficulty.

An AS-i network consists of a control

unit, a so-called master and the associated sensor and actuator components, namely the slaves. The master cyclically polls all configured slaves and exchanges input and output data with them. A telegram consists of 4 bits of user data. The master communicates with the slaves via a serial transmission protocol.

AS-i Safety at Work is a certified standard that enables safety-related components to be used in the AS-i system.


The safe AS-i system is designed for

safety applications up to category 4 according to EN ISO 13849-1 PL "e". Mixed operation of standard components and safety-oriented components is possible. The AS-interface master considers the safety-oriented slaves just like all other slaves and incorporates them into the network. The transmission protocol and the cables in the AS-i system are laid out so that they are also capable of transmitting safety-oriented telegrams.

The AS-i safety monitor is the central

safe component and monitors the safety-oriented slaves assigned to it within an AS-i system. The safety function is ensured via additional signal transmission between the safety-oriented slaves and the AS-i safety monitor. This transmission takes place with a special safety protocol.

In the case of a stop request or defect, the AS-i safety monitor in protection mode reliably switches the system off with a maximum reaction time of 40 ms.

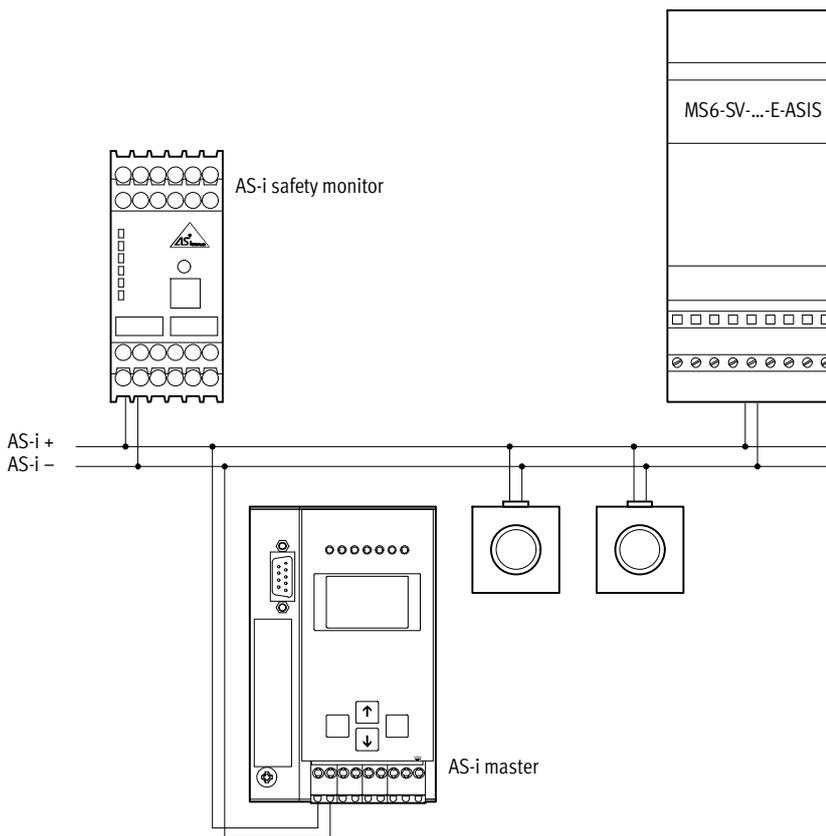

# Soft-start and quick exhaust valves MS6-SV-E, MS series

Technical data

General technical data	
Pneumatic connection 1, 2	
Female thread	G $\frac{1}{2}$
Connecting plate AG...	G $\frac{1}{4}$ , G $\frac{3}{8}$ , G $\frac{1}{2}$ or G $\frac{3}{4}$
Connecting plate AQ...	NPT $\frac{1}{4}$ , NPT $\frac{3}{8}$ , NPT $\frac{1}{2}$ or NPT $\frac{3}{4}$
Pneumatic connection 3	G1
Actuation type	Electric
Design	Piston seat
Type of mounting	Via accessories In-line installation
Mounting position	Any
Pressure indicator	Via pressure sensor for displaying output pressure via LCD display and electrical output Via pressure gauge for displaying output pressure Via pressure gauge with red/green scale for displaying output pressure G $\frac{1}{4}$ prepared
Position sensing principle	Solenoid piston principle
Valve function	3/2-way valve, closed, single solenoid Soft-start function, adjustable
Non-overlapping	No
Exhaust function	No flow control
Manual override	None
Reset method	Mechanical spring
Type of control	Piloted
Pilot air supply	Internal
Sealing principle	Soft

– Note: This product conforms to ISO 1179-1 and to ISO 228-1

Flow rate characteristics	
Pneumatic connection	Female thread G $\frac{1}{2}$
Standard nominal flow rate $q_{nN^{1)}$ [l/min]	
In main flow direction 1 $\rightarrow$ 2	4,300
Standard flow rate $q_N$ [l/min], $p_2 = 6$ bar	
In venting direction 2 $\rightarrow$ 3	9,000 <sup>2)</sup>
C value [l/s*min]	
In main flow direction 1 $\rightarrow$ 2	19.3
b value	
In main flow direction 1 $\rightarrow$ 2	0.21

1) Measured at  $p_1 = 6$  bar and  $p_2 = 5$  bar,  $\Delta p = 1$  bar

2) Measured with respect to atmosphere with silencer UOS-1

Electrical data		
Type	MS6-SV-...-E-10V24	MS6-SV-...-E-ASIS
Electrical connection	Sub-D, 9-pin	2x M12
Nominal operating voltage [V DC]	24	–
Permissible voltage [%] fluctuations	$\pm 10$	–
Operating voltage range for AS-interface [V DC]	–	22 ... 31.6
Duty cycle [%]	100	
Max. switching frequency [Hz]	0.5	
Switching time off [ms]	40	
Switching time on [ms]	130	
Signal status display	LED and floating contact	LED and via AS-i
Protection class	IP65 with plug socket	

# Soft-start and quick exhaust valves MS6-SV-E, MS series

Technical data

AS-i Safety-specific data	
Type	MS6-SV-...-E-ASIS
Fieldbus interface	Socket M12 (AS-i Out) and plug M12 (AS-i In)
LED displays	AS-i and status
Device-specific diagnostics	Inputs for cyclical digital data (exhausted, pressurised, fault) Cyclical analogue values (supply pressure p1, output pressure p2) Acyclical values (counter, pressure monitoring, fault, switching frequency exceeded, status)
Product identification	IO code: 0x7 Profile: 7.5.5 ID code: 0x5 ID1: 0xF ID2: 0x5
Vendor ID AS-interface	0x014D
Device ID AS-interface	0x03A6
Addressing range	Standard slave: 1 ... 31

Operating and environmental conditions		
Type	MS6-SV-...-E-10V24	MS6-SV-...-E-ASIS
Operating pressure [bar]	3.5 ... 10	3.5 ... 10
Operating medium	Compressed air according to ISO 8573-1:2010 [7:4:4]	
Note on operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)	
Ambient temperature [°C]	-10 ... +50 (0 ... +50) <sup>1)</sup>	0 ... +50
Temperature of medium [°C]	-10 ... +50 (0 ... +50) <sup>1)</sup>	0 ... +50
Storage temperature [°C]	-10 ... +50 (0 ... +50) <sup>1)</sup>	0 ... +50
Corrosion resistance class CRC <sup>2)</sup>	2	
Noise level [dB(A)]	75 (with silencer UOS-1)	
CE marking (see declaration of conformity) <sup>4)</sup>	To EU EMC Directive <sup>3)</sup>	
	To EU Machinery Directive	
Certification (variant UL1)	cULus recognized (OL)	
Certification	RCM Mark	

- 1) With pressure sensor AD...
- 2) Corrosion resistance class CRC 2 to Festo standard FN 940070  
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.
- 3) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.
- 4) Additional information [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

Weight [g]	
Soft-start and quick exhaust valve	2,000
Soft-start and quick exhaust valve with silencer UOS-1	2,200


Materials	
Housing	Die-cast aluminium
Piston rod	High-alloy stainless steel
Seals	NBR
Note on materials	RoHS-compliant

# Soft-start and quick exhaust valves MS6-SV-E, MS series

Technical data

## Switching point

Pressure p as a function of time t

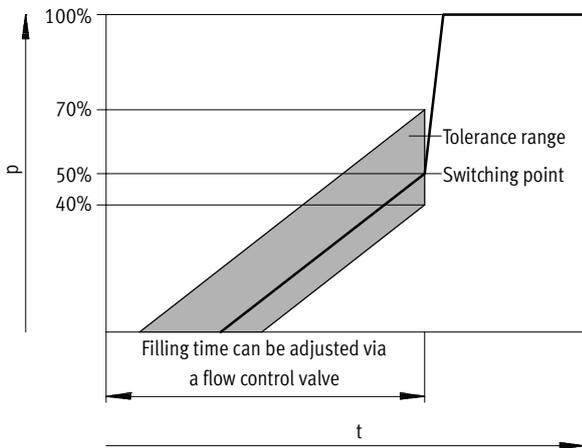

Note


The +20%/−10% switching point tolerance refers to the operating pressure p<sub>1</sub>.  
Example: A switching point from 1.6 bar to 2.8 bar is permissible at an operating pressure of 4 bar.

## Dimensions – Basic design

Download CAD data → [www.festo.com](http://www.festo.com)

With supply voltage 10V24,  
with female thread 1/2, with cover plate

With supply voltage ASIS,  
with female thread 1/2, with cover plate

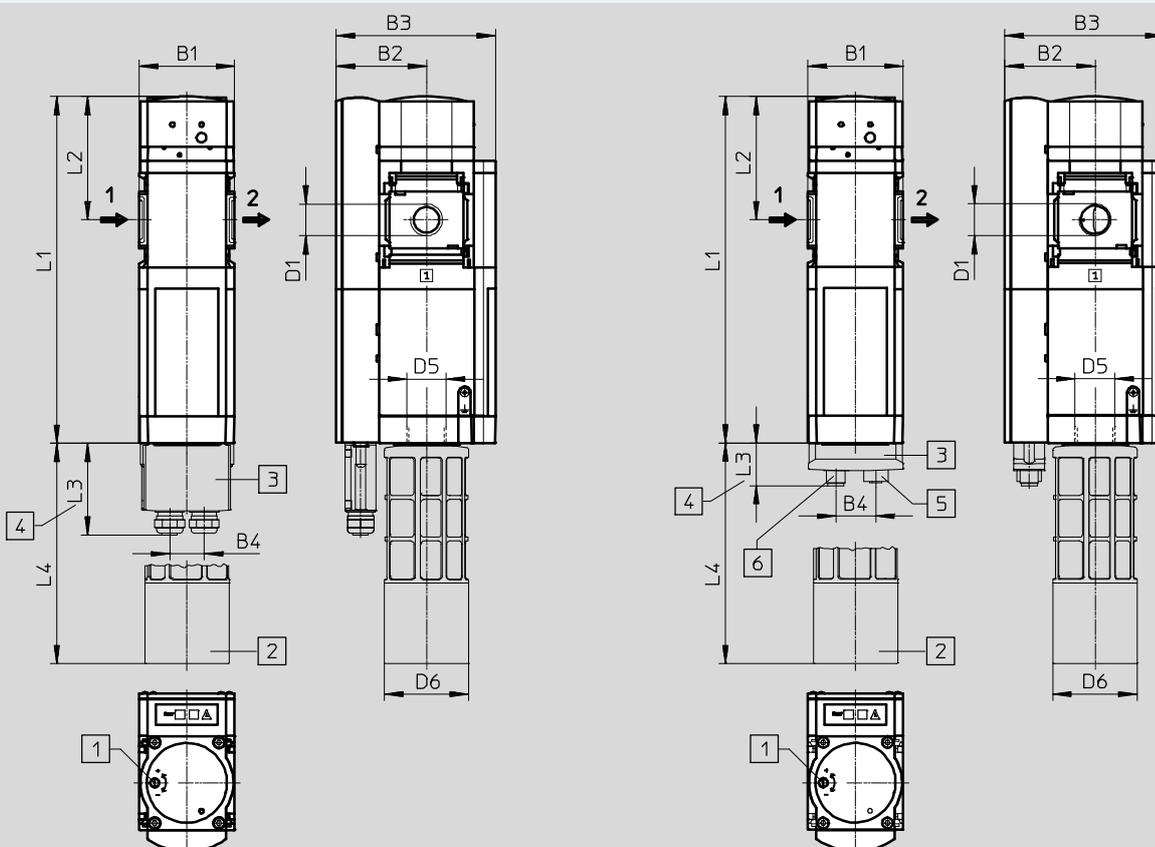

1 Regulating screw for flow control valve

3 Multi-pin plug socket NECA or AS-i configuration plug CACC

5 M12 socket, 5-pin  
6 M12 pin, 5-pin

→ Flow direction

2 Silencer UOS-1

4 Dimension without cable

Type	B1	B2	B3	B4	D1	D5	D6	L1	L2	L3	L4
MS6-SV-1/2-E-10V24	62	59	104	23	G1/2	G1	55	228	81	61	145
MS6-SV-1/2-E-ASIS				26						28	

Note: This product conforms to ISO 1179-1 and to ISO 228-1

# Soft-start and quick exhaust valves MS6-SV-E, MS series

Technical data


**FESTO**

## Dimensions – Pressure gauge/pressure gauge alternatives

Download CAD data → [www.festo.com](http://www.festo.com)

Integrated MS pressure gauge with standard scale AG or red/green scale RG, display unit [bar]

Adapter plate A4 for EN pressure gauge 1/4, without pressure gauge

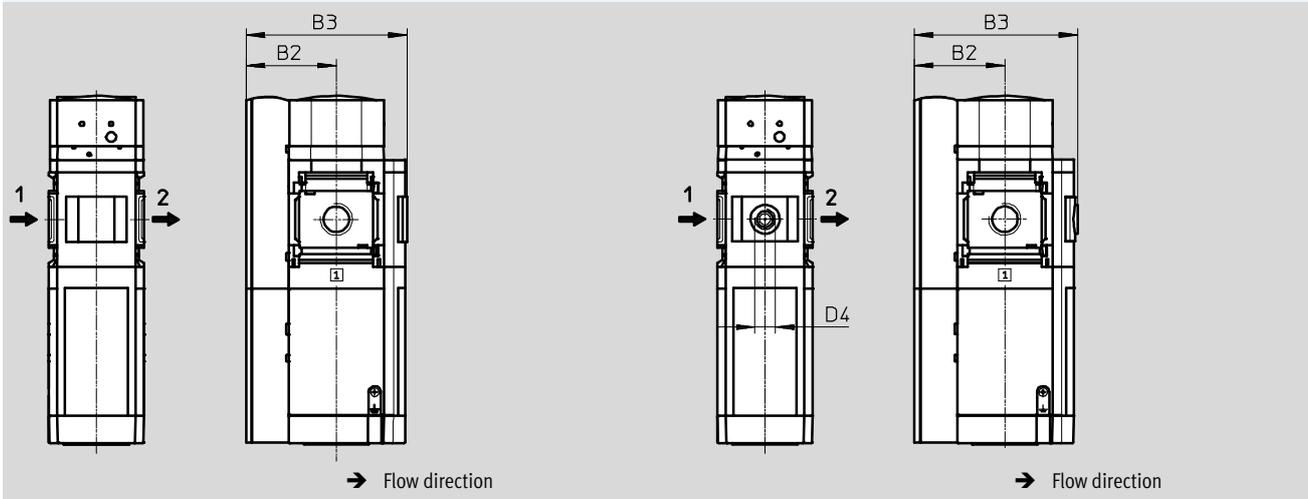

Type	B2	B3	D4
MS6-SV-...-E-...-AG	59	105	-
MS6-SV-...-E-...-RG	59	106.5	-
MS6-SV-...-E-...-A4	59	106.5	G1/4


Note: This product conforms to ISO 1179-1 and to ISO 228-1

## Dimensions – Pressure gauge/pressure gauge alternatives

Download CAD data → [www.festo.com](http://www.festo.com)

Pressure sensor with LCD display AD1 ... AD4

Technical data → Internet: [sde1](http://sde1)

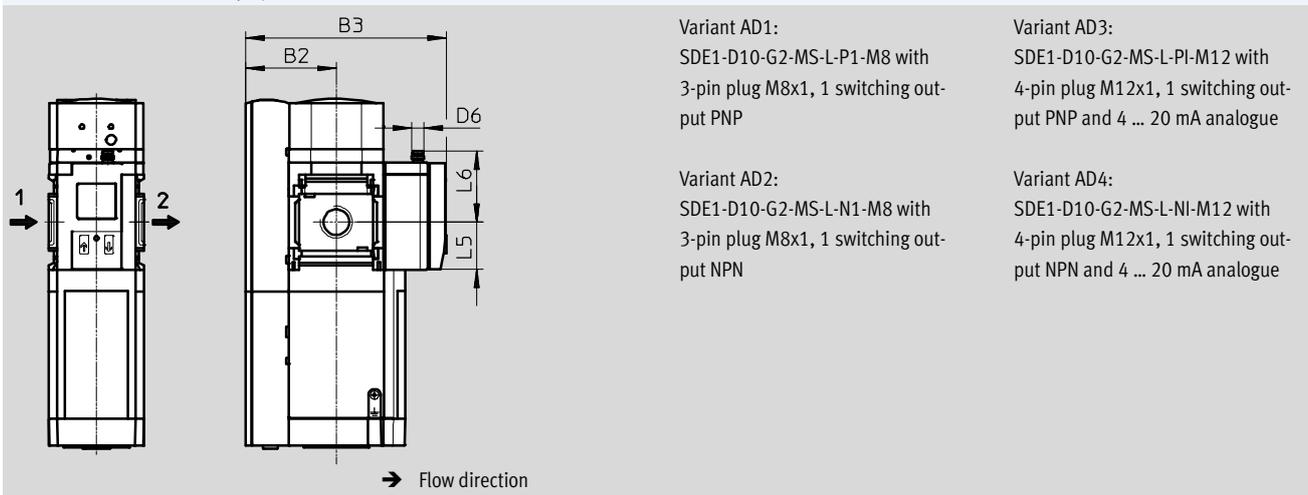

Variant AD1:  
SDE1-D10-G2-MS-L-P1-M8 with  
3-pin plug M8x1, 1 switching out-  
put PNP

Variant AD3:  
SDE1-D10-G2-MS-L-PI-M12 with  
4-pin plug M12x1, 1 switching out-  
put PNP and 4 ... 20 mA analogue

Variant AD2:  
SDE1-D10-G2-MS-L-N1-M8 with  
3-pin plug M8x1, 1 switching out-  
put NPN

Variant AD4:  
SDE1-D10-G2-MS-L-NI-M12 with  
4-pin plug M12x1, 1 switching out-  
put NPN and 4 ... 20 mA analogue

Type	B2	B3	D6	L5	L6
MS6-SV-...-E-...-AD1/AD2	59	131	M8x1	31.2	46.7
MS6-SV-...-E-...-AD3/AD4			M12x1		55.8

Note: This product conforms to ISO 1179-1 and to ISO 228-1

## Soft-start and quick exhaust valves MS6-SV-E, MS series

FESTO

Technical data

Ordering data – Supply voltage 10V24					
Size	Connection	Without silencer		With silencer	
		Part No.	Type	Part No.	Type
MS pressure gauge, display unit [bar]					
MS6	G1/2	548715	MS6-SV-1/2-E-10V24-AG	548717	MS6-SV-1/2-E-10V24-SO-AG
Pressure sensor with LCD display, plug M8, PNP, 3-pin					
MS6	G1/2	562580	MS6-SV-1/2-E-10V24-AD1	-	

Ordering data – Supply voltage ASIS					
Size	Connection	Without silencer		With silencer	
		Part No.	Type	Part No.	Type
MS pressure gauge, display unit [bar]					
MS6	G1/2	8001480	MS6-SV-1/2-E-ASIS-AG	8001481	MS6-SV-1/2-E-ASIS-SO-AG

# Soft-start and quick exhaust valves MS6-SV-E, MS series



Ordering data – Modular products

**M** Mandatory data →

Module No.	Series	Size	Function	Pneumatic connection	Performance level	Supply voltage
548713	MS	6	SV	1/2, AG..., AQ...	E	10V24, ASIS
<b>Ordering example</b>						
<b>548713</b>	<b>MS</b>	<b>6</b>	<b>- SV</b>	<b>- AGB</b>	<b>- E</b>	<b>- 10V24</b>

**Ordering table**

Grid dimension	[mm]	62	Conditions	Code	Enter code
<b>M</b> Module No.	<b>548713</b>				
Series	Standard			<b>MS</b>	MS
Size	6			<b>6</b>	6
Function	Soft-start and quick exhaust valve			<b>-SV</b>	-SV
Pneumatic connection	Female thread G1/2			<b>-1/2</b>	
	Connecting plate G1/4			<b>-AGB</b>	
	Connecting plate G3/8			<b>-AGC</b>	
	Connecting plate G1/2			<b>-AGD</b>	
	Connecting plate G3/4			<b>-AGE</b>	
	Connecting plate NPT1/4			<b>-AQN</b>	
	Connecting plate NPT3/8			<b>-AQP</b>	
	Connecting plate NPT1/2			<b>-AQR</b>	
	Connecting plate NPT3/4			<b>-AQS</b>	
Performance level	Category 4, 2-channel with self-monitoring, to EN ISO 13849-1			<b>-E</b>	-E
Supply voltage	24 V DC (pin allocation to EN 175301)			<b>-10V24</b>	
	22 ... 31.6 V DC, AS-i Safety at Work, SPEC3.0 Profile 7.5.5			<b>-ASIS</b>	

**Transfer order code**

<b>548713</b>	<b>MS</b>	<b>6</b>	<b>- SV</b>	<b>-</b>	<b>E</b>	<b>-</b>
---------------	-----------	----------	-------------	----------	----------	----------

# Soft-start and quick exhaust valves MS6-SV-E, MS series

Ordering data – Modular products

→ 0 Options						
Silencer	Pressure gauge/ pressure gauge alternatives	Alternative pres- sure gauge scale	Multi-pin plug socket	Type of mounting	UL certification	Flow direction
SO	AG, A4, RG, AD1 ... AD4	PSI, MPA	MP1, MP3, MP5	WPB	UL1	Z
- SO	- AG	-	- MP1	- WPB	-	-

Ordering table		Grid dimension	[mm]	62	Condi- tions	Code	Enter code
0	Silencer	Open silencer				-SO	
0	Pressure gauge/pressure gauge alternatives	MS pressure gauge			1	-AG	
		Adapter plate for EN pressure gauge 1/4, without pressure gauge			2	-A4	
		Integrated pressure gauge, red/green scale			1	-RG	
		Pressure sensor with LCD display, plug M8, 1 switching output PNP, 3-pin			2	-AD1	
		Pressure sensor with LCD display, plug M8, 1 switching output NPN, 3-pin			2	-AD2	
		Pressure sensor with LCD display, plug M12, 1 switching output PNP, 4-pin, analogue output 4 ... 20 mA			2	-AD3	
		Pressure sensor with LCD display, plug M12, 1 switching output NPN, 4-pin, analogue output 4 ... 20 mA			2	-AD4	
Alternative pressure gauge scale	psi			3	-PSI		
	MPa			3	-MPA		
Multi-pin plug socket	Sub-D, 9-pin, screw terminal, without cable, static enable signals (EN1 = 24 V, EN2 = 24 V)			2	-MP1		
	Sub-D, 9-pin, screw terminal, without cable, static enable signals (EN1 = 0 V, EN2 = 24 V), short-circuit detection possible			2	-MP3		
	Sub-D, 9-pin, screw terminal, without cable, static enable signals (EN1 = 0 V, EN2 = 24 V), galvanic isolation of the enable signals from the supply voltage			2	-MP5		
Type of mounting	Mounting bracket for large wall gap				-WPB		
UL certification	cULus, ordinary location for Canada and USA				-UL1		
Flow direction	Flow direction from right to left				-Z		

- 1 AG, RG Pressure gauge scale in bar
- 2 A4, AD1, AD2, AD3, AD4, MP1, MP3, MP5  
Now with supply voltage ASIS.

- 3 PSI, MPA Only in combination with pressure gauge AG or RG.  
With pressure gauge RG: PSI scale serves only as an auxiliary scale (inner scale), outer scale in bar


Transfer order code

- [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ]

# Soft-start and quick exhaust valves MS9-SV-C, MS series

Peripherals overview


## Soft-start and quick exhaust valve MS9-SV-C

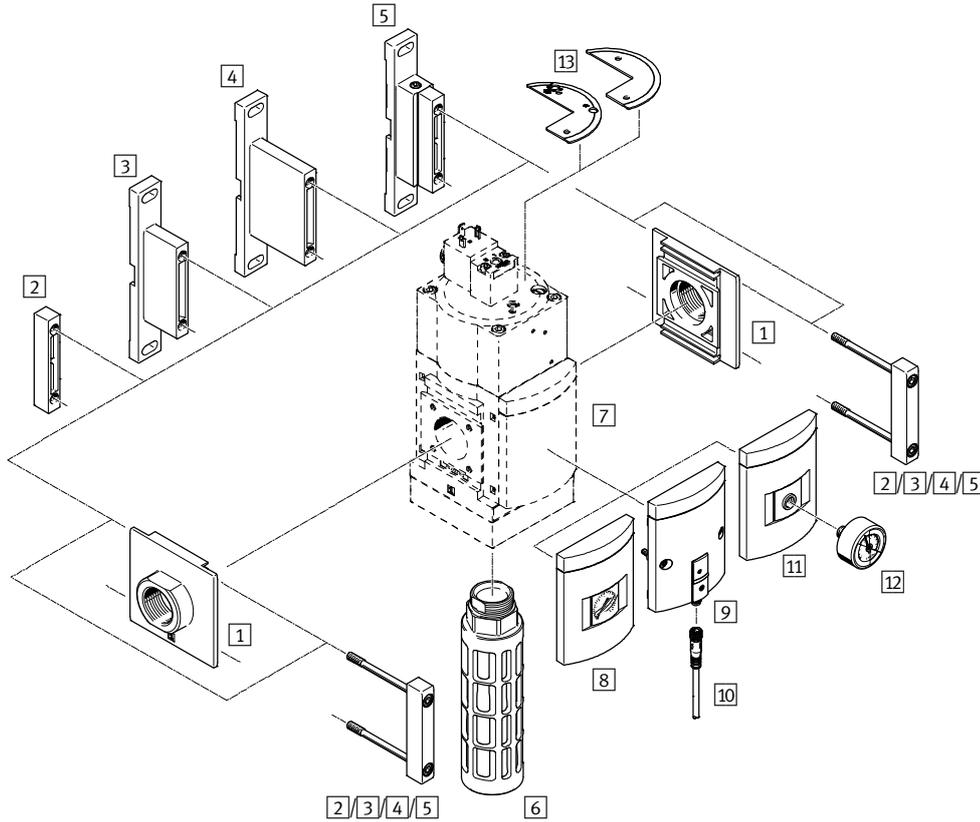

- Note  
 Additional accessories:  
 - Module connector for combination with size MS6, MS9 or MS12  
 → Internet: rmv, armv

Supply voltage  
 V24/V110/V230

Supply voltage  
 10V24P

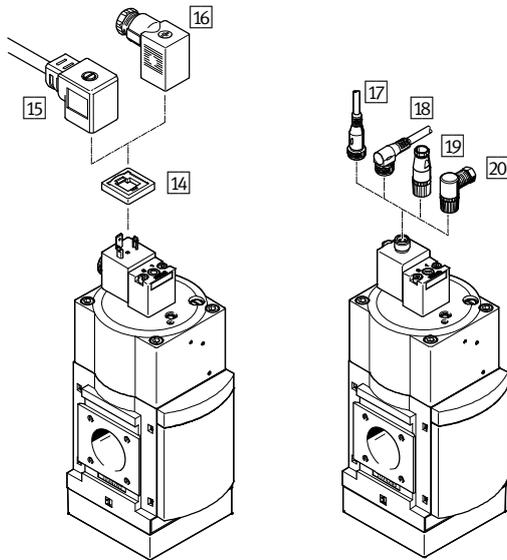

## Soft-start and quick exhaust valves MS9-SV-C, MS series

Peripherals overview

Mounting attachments and accessories					
		Individual device		Combination	→ Page/ Internet
		With female thread 3/4/1/N3/4/N1	With connecting plate AG.../AQ...	Module without connecting thread, without connecting plate G/NG	
1	Connecting plate-SET MS9-AG...	-	■	■	ms9-ag
	Connecting plate-SET MS9-AQ...	-	■	■	ms9-aq
2	Module connector MS9-MV	-	-	■	ms9-mv
3	Mounting bracket MS9-WP	■	■	■	ms9-wp
4	Mounting bracket MS9-WPB	■	■	■	ms9-wp
5	Mounting bracket MS9-WPM	■	■	■	ms9-wp
6	Silencer U-1-B	■	■	■	58
7	Cover plate VS	■	■	■	52
8	MS pressure gauge AG/RG	■	■	■	52
9	Pressure sensor with operational status indicator AD7 ... AD10	■	■	■	52
10	Connecting cable NEBU-M8...-LE3	■	■	■	59
11	Adapter plate for EN pressure gauge 1/4 A4	■	■	■	52
12	Pressure gauge MA	■	■	■	59
13	Cover MS9-SV-MH/MK	■	■	■	57
14	Illuminating seal MC-LD	■	■	■	59
15	Connecting cable KMC	■	■	■	58
16	Plug socket MSSD-C	■	■	■	58
17	Connecting cable NEBU-M12G5	■	■	■	59
18	Connecting cable NEBU-M12W5	■	■	■	59
19	Sensor socket SIE-GD	■	■	■	59
20	Angled socket SIE-WD	■	■	■	59

# Soft-start and quick exhaust valves MS9-SV-C, MS series

Type codes

		MS	9	-	SV	-	G	-	C	-	V24	-	S	-	VS
<b>Series</b>															
MS	Standard service unit														
<b>Size</b>															
9	Grid dimension 90 mm														
<b>Service function</b>															
SV	Soft-start and quick exhaust valve														
<b>Pneumatic connection</b>															
G	Module without connecting thread, without connecting plate														
<b>Performance level</b>															
C	Category 1, to EN ISO 13849-1														
<b>Supply voltage</b>															
V24	Supply voltage 24 V DC														
<b>Silencer</b>															
S	Silencer														
<b>Pressure gauge/pressure gauge alternatives</b>															
VS	Cover plate														


**Additional variants can be ordered using the modular product system → 52**

- Pneumatic connection
- Supply voltage
- Pressure gauge/pressure gauge alternatives
- Alternative pressure gauge scale
- Type of mounting
- Tamper protection
- UL certification
- Flow direction

# Soft-start and quick exhaust valves MS9-SV-C, MS series

Technical data

Function

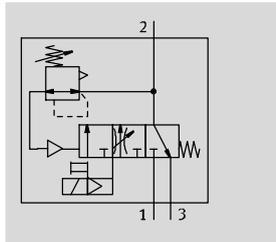

- - Flow rate  
8,300 ... 16,550 l/min
- - Temperature range  
0 ... +60 °C
- - Operating pressure  
3.5 ... 16 bar
- - [www.festo.com](http://www.festo.com)



Electro-pneumatic soft-start and quick exhaust valve for gradual pressurisation and quick exhausting of system components (single channel).

The main flow control valve in the end cap permits a gradual build-up of output pressure p2. Once the output pressure p2 has reached the set pressure switchover point (switching pressure), the valve opens and the full operating pressure p1 is present at the output.

- Suitable for applications with high flow rates and restricted space with medium safety requirements up to controller category 1, performance level "c"
- High volumetric flow rate for pressurisation and venting
- The filling flow rate can be set via a flow control valve for gradual pressure build-up
- Adjustable pressure switchover point
- Optional pressure sensor
- Optional cover for the control sections as tamper protection

Safety characteristics	
Conforms to standard	EN ISO 13849-1
Safety function	Venting
Performance level (PL)	Venting: up to category 1, PL c
Shock resistance	Shock test with severity level 1 according to FN 942017-5 and EN 60068-2-27
Vibration resistance	Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6

General technical data	
Pneumatic connection 1, 2	
Female thread	G3/4, G1, NPT3/4 or NPT1
Connecting plate AG...	G1/2, G3/4, G1, G1 1/4 or G1 1/2
Connecting plate AQ...	NPT1/2, NPT3/4, NPT1, NPT1 1/4 or NPT1 1/2
Module without connecting thread/plate G/NG	-
Pneumatic connection 3	G1 (NPT1) <sup>1)</sup>
Actuation type	Electric
Design	Piston spool valve
Type of mounting	Via accessories In-line installation
Mounting position	Any
Pressure indicator	Via pressure sensor for displaying output pressure via operational status indicator and electrical output Via pressure gauge for displaying output pressure Via pressure gauge with red/green scale for displaying output pressure G1/4 prepared
Valve function	3/2-way valve, closed, single solenoid Soft-start function, adjustable
Exhaust function	No flow control
Reset method	Mechanical spring
Type of control	Piloted
Sealing principle	Soft

1) Only with N3/4/N1/AQ.../NG without silencer S

- - Note: This product conforms to ISO 1179-1 and to ISO 228-1

# Soft-start and quick exhaust valves MS9-SV-C, MS series

Technical data

FESTO

Electrical data		
Coil characteristics	V24	24 V DC: 8.4 W; permissible voltage fluctuations $\pm 10\%$
	10V24P	24 V DC: 2.7 W; permissible voltage fluctuations $\pm 10\%$
	V110	110 V AC: 50/60 Hz; pick-up power 14.5 VA; holding power 10.5 VA; permissible voltage fluctuations $\pm 10\%$
	V230	230 V AC: 50/60 Hz; pick-up power 14.5 VA; holding power 10.5 VA; permissible voltage fluctuations $\pm 10\%$
Electrical connection	V24, V110, V230	Plug, square design to EN 175301-803, type A
	10V24P	M12x1, 4-pin, to IEC 61076-2-101, to DESINA
Protection class	IP65 with plug socket	
Duty cycle	[%]	100

Flow rate characteristics							
Pneumatic connection	Female thread		Connecting plate				
	$\frac{3}{4}/N\frac{3}{4}$	1/N1	AGD/AQR	AGE/AQS	AGF/AQT	AGG/AQU	AGH/AQV
Standard nominal flow rate $q_{nN}^{1)}$ [l/min]							
In main flow direction 1 $\rightarrow$ 2	14,150	16,460	8,300	13,250	16,340	16,550	15,910
Standard flow rate $q_n$ [l/min]							
For exhaust 6 $\rightarrow$ 0 bar with silencer S	21,450	20,870	21,720	20,900	20,370	19,730	19,850
C value [l/s*min]							
In main flow direction 1 $\rightarrow$ 2	57.61	69.59	31.43	54.24	68.24	68.45	66.07
In venting direction 2 $\rightarrow$ 3	55.52	54.01	56.22	54.07	52.73	51.06	51.36
b value							
In main flow direction 1 $\rightarrow$ 2	0.37	0.32	0.47	0.37	0.34	0.35	0.35
In venting direction 2 $\rightarrow$ 3	0.49	0.46	0.60	0.49	0.47	0.45	0.44

1) Measured at  $p_1 = 6$  bar and  $p_2 = 5$  bar,  $\Delta p = 1$  bar

Operating and environmental conditions			
Variant	Coil characteristic V24	Coil characteristic 10V24P	Coil characteristic V110, V230
Operating pressure [bar]	3.5 ... 16 (3.5 ... 10) <sup>2)</sup>	3.5 ... 10	3.5 ... 16 (3.5 ... 10) <sup>2)</sup>
Operating medium	Compressed air according to ISO 8573-1:2010 [7:4:4]		
Note on operating/pilot medium	Operation with lubricated medium possible (in which case lubricated operation will always be required)		
Ambient temperature [°C]	0 ... +60 (0 ... +50) <sup>2)</sup>		
Temperature of medium [°C]	0 ... +60 (0 ... +50) <sup>2)</sup>		
Storage temperature [°C]	0 ... +60 (0 ... +50) <sup>2)</sup>		
Corrosion resistance class CRC <sup>1)</sup>	2		
Noise level <sup>3)</sup> [dB(A)]	93 (with silencer S)		
CE marking (see declaration of conformity)	–	–	To EU Low Voltage Directive
Certification (variant UL1)	cULus recognized (OL)		

- 1) Corrosion resistance class CRC 2 to Festo standard FN 940070  
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.
- 2) With pressure sensor AD...
- 3) Venting at 10 bar at a distance of 1 m


Weight [g]	
Soft-start/quick exhaust valve	2,970
Soft-start/quick exhaust valve with silencer S	3,200

# Soft-start and quick exhaust valves MS9-SV-C, MS series

Technical data

## Materials


Sectional view

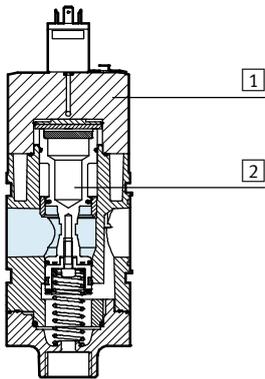

Soft-start and quick exhaust valve

1	Housing	Die-cast aluminium
2	Piston spool	Brass
-	Seals	NBR
Note on materials		RoHS-compliant

## Adjusting elements

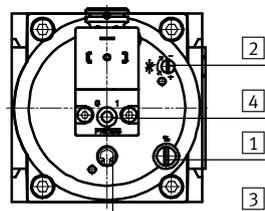

- 1 Screw for adjusting the pressure switchover point
- 2 Flow control screw for adjusting the filling time
- 3 Manual override at the soft-start and quick exhaust valve:
  - Detenting/self-resetting as soon as the solenoid coil or manual override at the pilot solenoid valve is actuated.
- 4 Manual override at the pilot solenoid valve:
  - Non-detenting, actuation from above


## Dimensions – Basic design

Download CAD data → [www.festo.com](http://www.festo.com)


Module without connecting thread, without connecting plate G/NG, with cover plate VS

Supply voltage V24/V110/V230

Supply voltage 10V24P

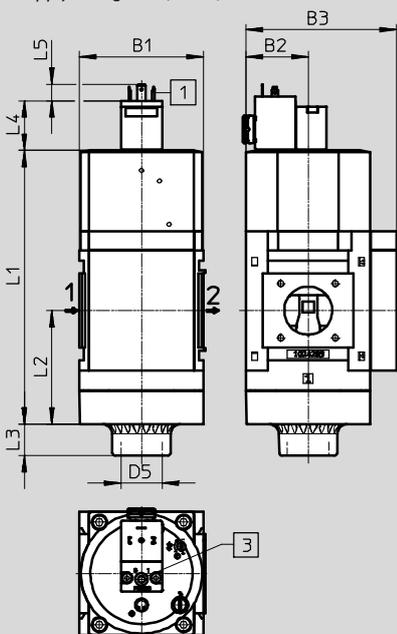

With silencer S

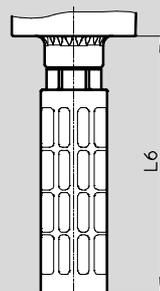

- 1 Plug connection to EN 175301-803
  - 2 Electrical connection to IEC 61076-2-101, plug M12x1, 4-pin to DESINA
  - 3 Manual override
- Flow direction


Type	B1	B2	B3	D2	D5	L1	L2	L3	L4	L5	L6
MS9-SV-G/NG-...-V24/V110/V230	90	45	109	-	G1 (NPT1) <sup>1)</sup>	200	83	23	36.4	12	189
MS9-SV-G/NG-...-10V24P				M12x1					39.2	10	

1) Only with N3/4/N1/AQ.../NG without silencer S

# Soft-start and quick exhaust valves MS9-SV-C, MS series

Technical data

**Dimensions – Connecting thread/connecting plate** Download CAD data → [www.festo.com](http://www.festo.com)

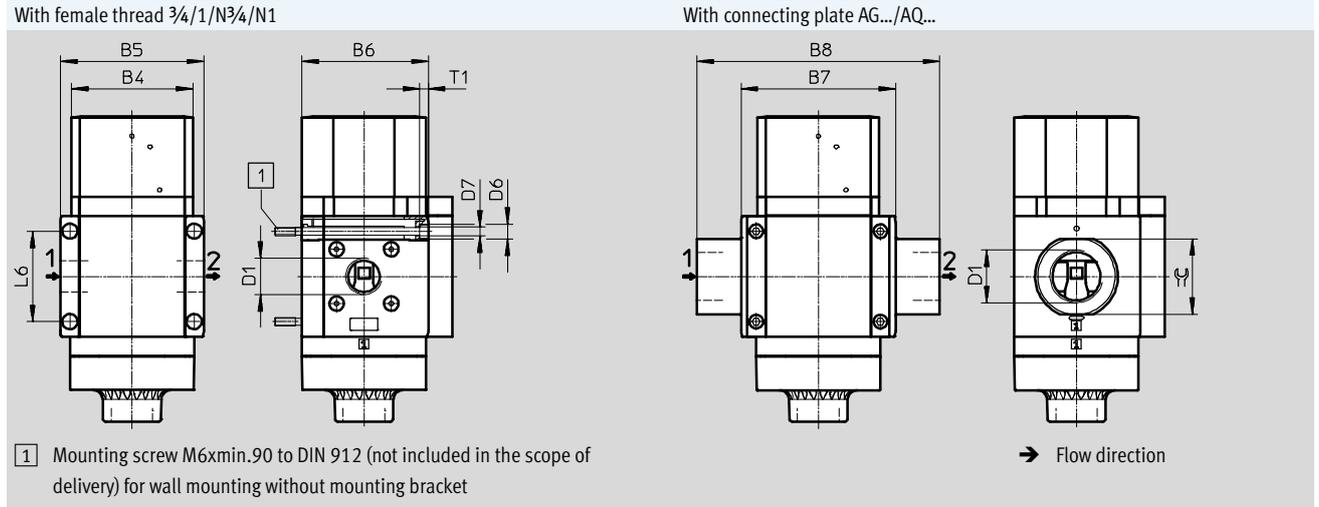


Type	B4	B5	B6	B7	B8	D1	D6	D7	L6	T1	⊖
MS9-SV-3/4	90	104	91.5	-	-	G3/4	11	6.5	66	6	-
MS9-SV-1						G1					
MS9-SV-AGD	-	-	-	112	132	G1/2	-	-	-	-	30
MS9-SV-AGE					132	G3/4					36
MS9-SV-AGF					142	G1					41
MS9-SV-AGG					162	G1 1/4					50
MS9-SV-AGH					176	G1 1/2					55
MS9-SV-N3/4	90	104	91.5	-	-	NPT3/4-14	11	6.5	66	6	-
MS9-SV-N1						NPT1-11 1/2					
MS9-SV-AQR	-	-	-	112	132	NPT1/2-14	-	-	-	-	30
MS9-SV-AQS					132	NPT3/4-14					36
MS9-SV-AQT					142	NPT1-11 1/2					41
MS9-SV-AQU					162	NPT1 1/4-11 1/2					50
MS9-SV-AQV					176	NPT1 1/2-11 1/2					55

Note: This product conforms to ISO 1179-1 and to ISO 228-1

# Soft-start and quick exhaust valves MS9-SV-C, MS series

Technical data

**Dimensions – Pressure gauge/pressure gauge alternatives** Download CAD data → [www.festo.com](http://www.festo.com)  
 Integrated MS pressure gauge with standard scale AG or red/green scale RG Adapter plate A4 for EN pressure gauge 1/4, without pressure gauge

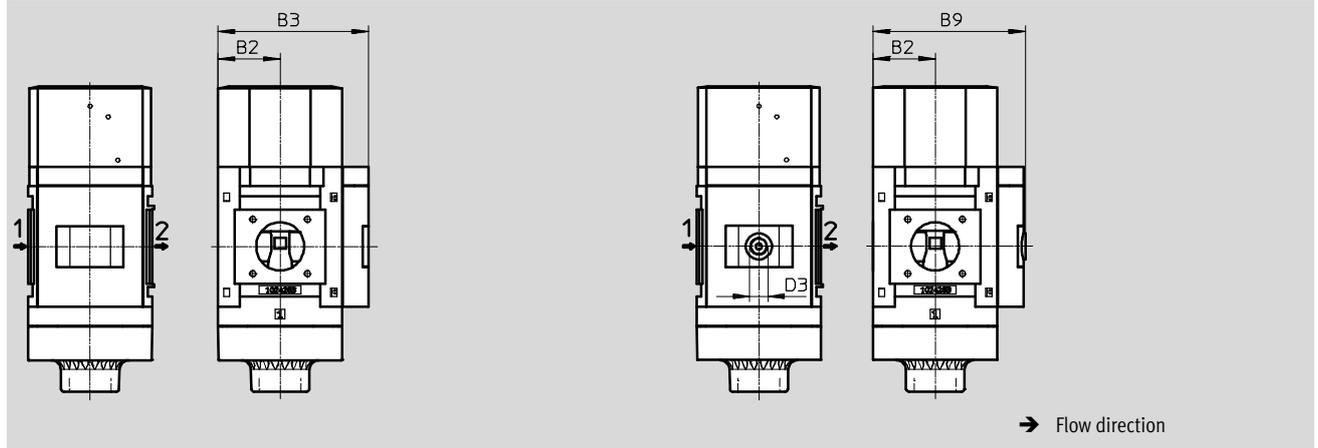

Type	B2	B3	B9	D3
MS9-SV-...-AG/RG	45	109	–	–
MS9-SV-...-A4		–	110	G1/4

– | – Note: This product conforms to ISO 1179-1 and to ISO 228-1

**Dimensions – Pressure gauge/pressure gauge alternatives** Download CAD data → [www.festo.com](http://www.festo.com)  
 Pressure sensor with operational status indicator AD7 ... AD10 Technical data → Internet: [sde5](http://sde5.festo.com)

**Variant AD7:**  
SDE5-D10-0-...-P-M8 with 3-pin plug M8x1, threshold value comparator, 1 switching output PNP, N/O contact

**Variant AD8:**  
SDE5-D10-C-...-P-M8 with 3-pin plug M8x1, threshold value comparator, 1 switching output PNP, N/C contact

**Variant AD9:**  
SDE5-D10-03-...-P-M8 with 3-pin plug M8x1, window comparator, 1 switching output PNP, N/O contact

**Variant AD10:**  
SDE5-D10-C3-...-P-M8 with 3-pin plug M8x1, window comparator, 1 switching output PNP, N/C contact

Type	B2	B11	D3
MS9-SV-...-AD7/AD8/AD9/AD10	45	112	M8

Ordering data			
Size	Connection	With silencer	
		Part No.	Type
Cover plate			
MS9	–	570737	MS9-SV-G-C-V24-S-VS

# Soft-start and quick exhaust valves MS9-SV-C, MS series



Ordering data – Modular products

M Mandatory data						
Module No.	Series	Size	Function	Pneumatic connection	Performance level	Supply voltage
562176	MS	9	SV	3/4, 1, AG..., N3/4, N1, AQ..., G, NG	C	V24, 10V24P, V110, V230
<b>Ordering example</b>						
<b>562176</b>	<b>MS</b>	<b>9</b>	<b>- SV</b>	<b>- 1</b>	<b>- C</b>	<b>- V24</b>

Ordering table					
Grid dimension	[mm]	90	Conditions	Code	Enter code
M	Module No.	<b>562176</b>			
	Series	Standard		<b>MS</b>	MS
	Size	9		<b>9</b>	9
	Function	Soft-start and quick exhaust valve		<b>-SV</b>	-SV
	Pneumatic connection	Female thread G3/4		<b>-3/4</b>	
		Female thread G1		<b>-1</b>	
		Connecting plate G1/2		<b>-AGD</b>	
		Connecting plate G3/4		<b>-AGE</b>	
		Connecting plate G1		<b>-AGF</b>	
		Connecting plate G1 1/4		<b>-AGG</b>	
		Connecting plate G1 1/2		<b>-AGH</b>	
		Female thread NPT3/4		<b>-N3/4</b>	
		Female thread NPT1		<b>-N1</b>	
		Connecting plate NPT1/2		<b>-AQR</b>	
		Connecting plate NPT3/4		<b>-AQS</b>	
		Connecting plate NPT1		<b>-AQT</b>	
		Connecting plate NPT1 1/4		<b>-AQU</b>	
		Connecting plate NPT1 1/2		<b>-AQV</b>	
		Module without connecting thread, without connecting plate		<b>-G</b>	
		Module without connecting thread, without connecting plate		<b>-NG</b>	
		Performance level	Category 1, 1-channel, to EN ISO 13849-1		<b>-C</b>
	Supply voltage	24 V DC (pin allocation to EN 175301), 16 bar		<b>-V24</b>	
		24 V DC, M12 to IEC 61076-2-101, 10 bar		<b>-10V24P</b>	
		110 V AC (pin allocation to EN 175301), 16 bar		<b>-V110</b>	
		230 V AC (pin allocation to EN 175301), 16 bar		<b>-V230</b>	

Transfer order code

562176	MS	9	- SV	-		- C	-	
--------	----	---	------	---	--	-----	---	--

# Soft-start and quick exhaust valves MS9-SV-C, MS series

Ordering data – Modular products

<b>[O]</b>	<b>[M]</b>	<b>[O] Options</b>				
Silencer	Pressure gauge/ pressure gauge alternatives	Alternative pressure gauge scale	Type of mounting	Tamper protection	UL certification	Flow direction
S	AG, VS, A4, RG, AD7 ... AD10	PSI, MPA, BAR	WP, WPM, WPB	MH, MK	UL1	Z
- <b>S</b>	- <b>AG</b>	-	-	-	-	-

Ordering table		Grid dimension [mm]	90	Condi- tions	Code	Enter code
<b>[O]</b>	Silencer	Silencer			<b>-S</b>	
<b>[M]</b>	Pressure gauge/pressure gauge alternatives	MS pressure gauge			<b>-AG</b>	
		Cover plate			<b>-VS</b>	
		Adapter plate for EN pressure gauge 1/4, without pressure gauge			<b>-A4</b>	
		Integrated pressure gauge, red/green scale		<b>[1]</b>	<b>-RG</b>	
		Pressure sensor with operational status indicator, plug M8, threshold value comparator, PNP, N/O contact		<b>[2]</b>	<b>-AD7</b>	
		Pressure sensor with operational status indicator, plug M8, threshold value comparator, PNP, N/C contact		<b>[2]</b>	<b>-AD8</b>	
		Pressure sensor with operational status indicator, plug M8, window comparator, PNP, N/O contact		<b>[2]</b>	<b>-AD9</b>	
		Pressure sensor with operational status indicator, plug M8, window comparator, PNP, N/C contact		<b>[2]</b>	<b>-AD10</b>	
<b>[O]</b>	Alternative pressure gauge scale	psi		<b>[3]</b>	<b>-PSI</b>	
		MPa		<b>[3]</b>	<b>-MPA</b>	
		bar		<b>[3]</b>	<b>-BAR</b>	
	Type of mounting	Mounting bracket standard design		<b>[4]</b>	<b>-WP</b>	
		Mounting bracket for attaching the service units		<b>[4]</b>	<b>-WPM</b>	
		Mounting bracket for large wall gap		<b>[4]</b>	<b>-WPB</b>	
	Tamper protection	Without manual override (manual override at soft-start/quick exhaust valve locked, adjusting screws open, manual override at pilot solenoid valve locked)			<b>-MH</b>	
		Complete (manual override at soft-start/quick exhaust valve locked, adjusting screws locked, manual override at pilot solenoid valve locked)			<b>-MK</b>	
	UL certification	cULus, ordinary location for Canada and USA		<b>[5]</b>	<b>-UL1</b>	
	Flow direction	Flow direction from right to left			<b>-Z</b>	

- |                                |   |                          |   |
|--------------------------------|---|--------------------------|---|
| <b>[1] RG</b>                  | Not with alternative pressure gauge scale PSI,<br>PSI scale serves only as an auxiliary scale (inner scale), outer scale in bar | <b>[3] PSI, MPA, BAR</b> | Only in combination with pressure gauge AG or RG. |
| <b>[2] AD7, AD8, AD9, AD10</b> | Measuring range max. 10 bar   | <b>[4] WP, WPM, WPB</b>  | Not with pneumatic connection G, NG               |
|                                |   | <b>[5] UL1</b>           | Not with supply voltage V110, V230                |

**Transfer order code**

- **S** - - - - -

## Soft-start and quick exhaust valves MS-SV, MS series

FESTO

Accessories

### Multi-pin plug socket NECA

(order code in the modular product system: MP1/MP3/MP5)

- For soft-start and quick exhaust valve MS6-SV-E-10V24



Technical data		
Type of mounting		Via through-hole
Electrical connection 1		Sub-D 9-pin
Electrical connection 2		Screw terminal 9-pin
Operating voltage range	[V DC]	21.6 ... 26.4
Nominal operating voltage	[V DC]	24
Acceptable current load	[A]	1.0
Connection cross section	[mm <sup>2</sup> ]	0.34 ... 1.0 without wire end sleeves
	[mm <sup>2</sup> ]	0.34 ... 0.5 with wire end sleeves
Permissible cable diameter	[mm]	5.0 ... 10.0
Protection class to IEC 60529		IP65

Operating and environmental conditions		
Relative air humidity		95%, non-condensing
Ambient temperature	[°C]	0 ... +50
Storage temperature	[°C]	-20 ... +70
Corrosion resistance class CRC <sup>1)</sup>		2

- 1) Corrosion resistance class CRC 2 to Festo standard FN 940070  
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.


Materials	
Housing	PA reinforced
Screws	Steel
Union nut	Brass
Seals	NBR

# Soft-start and quick exhaust valves MS-SV, MS series

Accessories

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

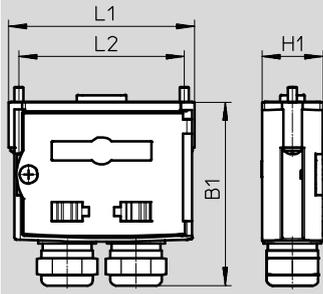

B1	H1	L1	L2
61	20	61	54.1

## Ordering data

Description	Connection	Weight [g]	Part No.	Type
For MS6-SV-E-10V24	Without cable, static enable signals (EN1 = 24 V, EN2 = 24 V)	60	548719	NECA-S1G9-P9-MP1
	Without cable, static enable signals (EN1 = 0 V, EN2 = 24 V), cross-circuit detection possible	60	552703	NECA-S1G9-P9-MP3
	Without cable, static enable signals (EN1 = 0 V, EN2 = 24 V), galvanic isolation of the enable signals from the supply voltage	60	573695	NECA-S1G9-P9-MP5

# Soft-start and quick exhaust valves MS-SV, MS series

Accessories

### Silencer UOS-1

(order code in the modular product system: S0)

- For soft-start and quick exhaust valve MS6-SV-D/E

### Silencer UOS-1-LF

- For soft-start and quick exhaust valve MS6-SV-D/E

 Note  
The space-saving silencer UOS-1-LF may only be used for applications with low exhaust rates. Pneumatic port 2 at the soft-start and quick exhaust valve MS6-SV-D/E must be reduced to G $\frac{1}{4}$  using a connecting plate MS6-AGB.




Technical data	
Pneumatic connection	G1
Design	Open silencer
Type of mounting	Via male thread
Mounting position	Any
Type of seal on threaded collar	No seal

Operating and environmental conditions	
Operating pressure [bar]	0 ... 10
Operating medium	Compressed air to ISO 8573-1:2010 [-:-:-]
Ambient temperature [°C]	-10 ... +50
Corrosion resistance class CRC <sup>1)</sup>	2

1) Corrosion resistance class CRC 2 to Festo standard FN 940070  
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

Materials		
Type	UOS-1	UOS-1-LF
Housing	POM	Wrought aluminium alloy
Sleeve	Wrought aluminium alloy	-
Silencer insert	PE	
Note on materials	RoHS-compliant	
	Free of copper and PTFE	

### Dimensions Download CAD data → [www.festo.com](http://www.festo.com)

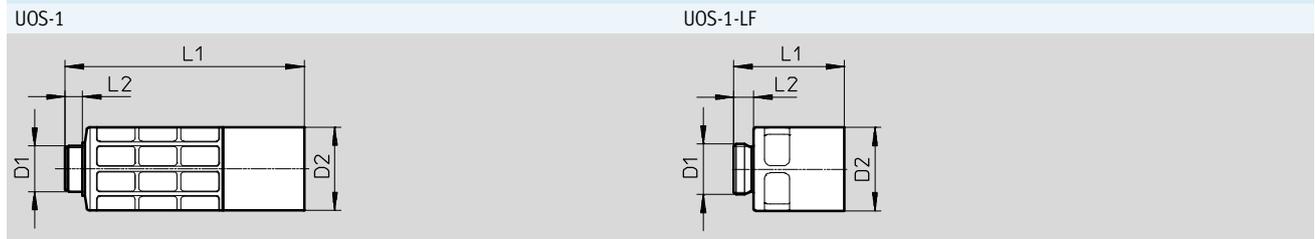

Type	D1	D2	L1	L2
UOS-1	G1	∅	156.5	11.5
UOS-1-LF	G1	55	72.2	13

Ordering data				
Description		Weight [g]	Part No.	Type
For MS6-SV-D/E	For high exhaust rate	200	552252	UOS-1
	For low exhaust rate	157.9	1901207	UOS-1-LF


# Soft-start and quick exhaust valves MS-SV, MS series

Accessories

## AS-i configuration plug CACC

- For soft-start and quick exhaust valve MS6-SV-E-ASIS

Note on materials: RoHS-compliant

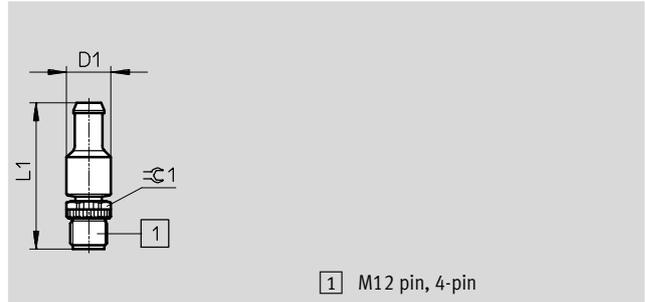

1 M12 pin, 4-pin


Dimensions and ordering data					
Description	D1	L1	±G1	Part No.	Type
For MS6-SV-E-ASIS	14.5	48.3	13	573923	CACC-CP-AS

## Cover MS-SV-MH/MK

(order code in the modular product system: MH/MK)

- For soft-start and quick exhaust valve MS6/9-SV-C

Note on materials: RoHS-compliant

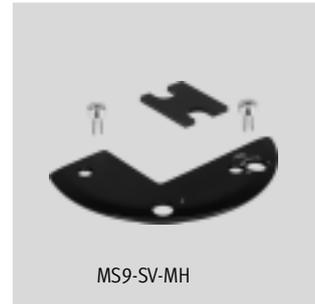

Ordering data				
Description		CRC <sup>1)</sup>	Part No.	Type
For MS6-SV-C	Tamper protection for manual override at the soft-start and quick exhaust valve, flow control screw, adjusting screw for pressure switchover point and manual override at the pilot solenoid valve (MS6-SV-...-C-10V24/10V24P only)	2	8001479	MS6-SV-C-MK
For MS9-SV-C	Tamper protection for manual override at the soft-start and quick exhaust valve, flow control screw, adjusting screw for pressure switchover point and manual override at the pilot solenoid valve	2	1457669	MS9-SV-MK
	Tamper protection for manual override at the soft-start and quick exhaust valve and manual override at the pilot solenoid valve	2	1457670	MS9-SV-MH


1) Corrosion resistance class CRC 2 to Festo standard FN 940070  
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

# Soft-start and quick exhaust valves MS-SV, MS series



FESTO

Accessories

Ordering data – Silencer U-...-B				Technical data → Internet: u	
	Description	Pneumatic connection	Order code in the modular product system	Part No.	Type
	For MS6-SV-C	G3/4	S	<b>6845</b>	<b>U-3/4-B</b>
	For MS9-SV-C	G1	S	<b>151990</b>	<b>U-1-B</b>

Ordering data – Proximity sensor SMT						Technical data → Internet: smt		
	Description	Switching output	Switching element function	Electrical connection	Cable length [m]	Order code in the modular product system	Part No.	Type
	For MS6-SV-D	PNP	N/O contact	Cable with plug M8x1, 3-pin	0.3	2M8/S3	★ <b>574334</b>	<b>SMT-8M-A-PS-24V-E-0,3-M8D</b>
				Cable with plug M12x1, 3-pin	0.3	2M12/S3	★ <b>574337</b>	<b>SMT-8M-A-PS-24V-E-0,3-M12</b>
	For MS6-SV-D	PNP	N/O contact	Cable, 3-wire	5	20E/S3	★ <b>574336</b>	<b>SMT-8M-A-PS-24V-E-5,0-OE</b>

Ordering data – Plug socket MSSD				Technical data → Internet: mssd	
	Description	Electrical connection	Type of mounting for cable connection	Part No.	Type
	For MS6-SV-C/D	3-pin	Clamping screws	★ <b>151687</b>	<b>MSSD-EB</b>
		4-pin	Insulation displacement connectors	<b>192745</b>	<b>MSSD-EB-S-M14</b>
	For MS9-SV-C	3-pin	Clamping screws	<b>539712</b>	<b>MSSD-EB-M12</b>
		3-pin	Clamping screws	<b>34583</b>	<b>MSSD-C</b>
		4-pin	Insulation displacement connectors	<b>192748</b>	<b>MSSD-C-S-M16</b>
		4-pin	Insulation displacement connectors	<b>192748</b>	<b>MSSD-C-S-M16</b>

Ordering data – Plug socket with cable KMEB/connecting cable KMC						Technical data → Internet: kmeb, kmc	
	Description	Operating voltage	Electrical connection	Switching status display	Cable length [m]	Part No.	Type
	For MS6-SV-C/D	24 V DC	2-pin	LED	2.5	<b>547268</b>	<b>KMEB-3-24-2,5-LED</b>
				–	5	<b>547269</b>	<b>KMEB-3-24-5-LED</b>
				–	2.5	<b>547270</b>	<b>KMEB-3-24-2,5</b>
			3-pin	LED	5	<b>547271</b>	<b>KMEB-3-24-5</b>
				LED	2.5	<b>151688</b>	<b>KMEB-1-24-2,5-LED</b>
				LED	5	<b>151689</b>	<b>KMEB-1-24-5-LED</b>
		230 V AC	3-pin	–	10	<b>193457</b>	<b>KMEB-1-24-10-LED</b>
				–	2.5	<b>151690</b>	<b>KMEB-1-230AC-2,5</b>
			3-pin	–	5	<b>151691</b>	<b>KMEB-1-230AC-5</b>
				–	5	<b>151691</b>	<b>KMEB-1-230AC-5</b>
	For MS9-SV-C	24 V DC	3-pin	LED	2.5	<b>30931</b>	<b>KMC-1-24DC-2,5-LED</b>
					5	<b>30933</b>	<b>KMC-1-24DC-5-LED</b>
					10	<b>193459</b>	<b>KMC-1-24-10-LED</b>
		230 V AC	3-pin	–	2.5	<b>30932</b>	<b>KMC-1-230AC-2,5</b>
					5	<b>30934</b>	<b>KMC-1-230AC-5</b>
					5	<b>30934</b>	<b>KMC-1-230AC-5</b>

Festo core product range

- ★ Ready for dispatch from the Festo factory in 24 hours
- ☆ Ready for dispatch in 5 days maximum from stock

## Soft-start and quick exhaust valves MS-SV, MS series

FESTO

Accessories

Ordering data – Illuminating seal MEB-LD/MC-LD				Technical data → Internet: meb, mc	
	Description	Operating voltage range	Part No.	Type	
	For plug socket with cable KMEB and plug socket MSSD-EB	12 ... 24 V DC	<b>151717</b>	<b>MEB-LD-12-24DC</b>	
		230 V DC/AC ±10%	<b>151718</b>	<b>MEB-LD-230AC</b>	
	For connecting cable KMC and plug socket MSSD-C	12 ... 24 V DC	<b>19145</b>	<b>MC-LD-12-24DC</b>	
		230 V DC/AC ±10%	<b>19146</b>	<b>MC-LD-230AC</b>	

Ordering data – Connecting cable NEBU-M8				Technical data → Internet: nebu	
	Electrical connection	Number of wires	Cable length [m]	Part No.	Type
	M8x1, straight socket	3	2.5	★ <b>541333</b>	<b>NEBU-M8G3-K-2.5-LE3</b>
			5	★ <b>541334</b>	<b>NEBU-M8G3-K-5-LE3</b>
	M8x1, angled socket	3	2.5	★ <b>541338</b>	<b>NEBU-M8W3-K-2.5-LE3</b>
			5	★ <b>541341</b>	<b>NEBU-M8W3-K-5-LE3</b>

Ordering data – Connecting cable NEBU-M12				Technical data → Internet: nebu	
	Electrical connection	Number of wires	Cable length [m]	Part No.	Type
	M12x1, straight socket	4	2.5	★ <b>550326</b>	<b>NEBU-M12G5-K-2.5-LE4</b>
			5	★ <b>541328</b>	<b>NEBU-M12G5-K-5-LE4</b>
	M12x1, angled socket	4	2.5	<b>550325</b>	<b>NEBU-M12W5-K-2.5-LE4</b>
			5	<b>541329</b>	<b>NEBU-M12W5-K-5-LE4</b>

Ordering data – Sensor socket SIE-GD			Technical data → Internet: sie-gd	
	Electrical connection		Part No.	Type
	M12x1, 4-pin		<b>18494</b>	<b>SIE-GD</b>

Ordering data – Angled socket SIE-WD			Technical data → Internet: sie-wd	
	Electrical connection		Part No.	Type
	M12x1, 4-pin		<b>12956</b>	<b>SIE-WD-TR</b>

Ordering data – Pressure gauge MA						
	Nominal size	Pneumatic connection	Display range		Part No.	Type
			[bar]	[psi]		
	Pressure gauge MA, EN 837-1					
	40	R $\frac{1}{4}$	0 ... 16	0 ... 232	<b>187080</b>	<b>MA-40-16-R<math>\frac{1}{4}</math>-EN</b>
		G $\frac{1}{4}$	0 ... 16	0 ... 232	<b>183901</b>	<b>MA-40-16-G<math>\frac{1}{4}</math>-EN</b>
	Pressure gauge MA, EN 837-1, with red/green range					
50	R $\frac{1}{4}$	0 ... 16	–	<b>525729</b>	<b>MA-50-16-R<math>\frac{1}{4}</math>-E-RG</b>	

Festo core product range

- ★ Ready for dispatch from the Festo factory in 24 hours
- ☆ Ready for dispatch in 5 days maximum from stock