

GPP

Version 1 – Level Probe in plastic housing

Electric interface through terminal screws in the probe head. Cable feed out through a M16 gland, for protection class IP 65.

- Elektrode lenth available 5 to 4000mm (please specify with your order)
- 1 - 7 elektodes
- All parts which may touch the medium are made from physiologically harmless materials
- For conductive filling level acquisition




Technical data

Mounting method:	Thread	Probe-head material:	PPH
Mounting orientation:	any	Electrode material:	V4A / 1.4571 (optional HAC-C4; Titanium)
Media temperature:	max. 90°C	Coating:	Polyolifin (optional Kynar)
Media pressure:	max. 10 bar (+60°C)	Sealing ring:	NBR 70

Size	Electrodes	Standard-Model
1/2"	1	GPPE - 1VP1
1/2"	2	GPPE - 2VP1
3/4"	2	GPPF - 2VP1
3/4"	3	GPPF - 3VP1
1"	1	GPPG - 1VP1
1"	2	GPPG - 2VP1
1"	3	GPPG - 3VP1

Size	Electrodes	Standard-Model
1"	4	GPPG - 4VP1
1 1/2"	2	GPPI - 2VP1
1 1/2"	3	GPPI - 3VP1
1 1/2"	4	GPPI - 4VP1
1 1/2"	5	GPPI - 5VP1
1 1/2"	6	GPPI - 6VP1
1 1/2"	7	GPPI - 7VP1

Dimensions

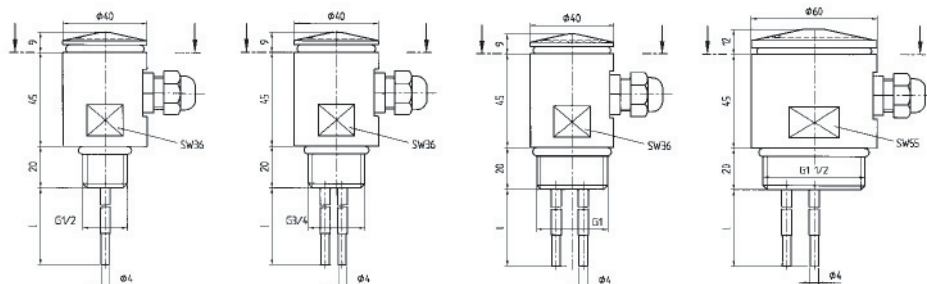

Options

Distance fastener	Material PPH
Lock-nut	Material PPH
Mounting bracket	Material V2A / 1.4301
Junction cable	with numeric labeled wires