

# STRAIGHT QUICK CLOSING VALVE


**DIN**



**Fig 703GC**

Bronze / SS  
Hydraulic-Pneumatic-Manual Operation

- DIN 3202 F1
- With Push Button
- Flanged PN 16

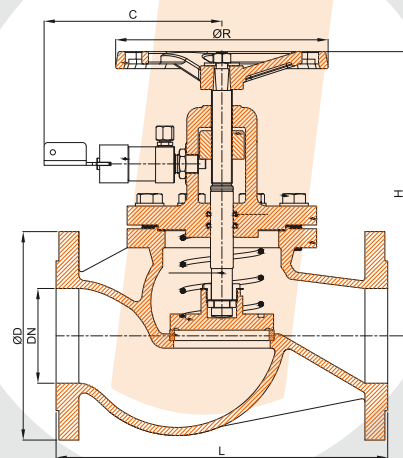

| DN<br>[mm] | ØD<br>[mm] | L<br>[mm] | H<br>[mm] | C<br>[mm] | ØR<br>[mm] | Weight<br>[Kg] | IMPA | Order Code |
|------------|------------|-----------|-----------|-----------|------------|----------------|------|------------|
| 15         | 95         | 130       | 175       | 185       | 120        | 4              | -    | 703GC015   |
| 20         | 105        | 150       | 175       | 185       | 120        | 4.5            | -    | 703GC020   |
| 25         | 115        | 160       | 190       | 185       | 140        | 6              | -    | 703GC025   |
| 32         | 140        | 180       | 190       | 185       | 140        | 8              | -    | 703GC032   |
| 40         | 150        | 200       | 205       | 185       | 160        | 12             | -    | 703GC040   |
| 50         | 165        | 230       | 215       | 185       | 160        | 14             | -    | 703GC050   |
| 65         | 185        | 290       | 245       | 190       | 180        | 20             | -    | 703GC065   |
| 80         | 200        | 310       | 270       | 190       | 200        | 26             | -    | 703GC080   |
| 100        | 220        | 350       | 305       | 190       | 225        | 36             | -    | 703GC100   |
| 125        | 250        | 400       | 330       | 190       | 250        | 58             | -    | 703GC125   |
| 150        | 285        | 480       | 380       | 190       | 300        | 75             | -    | 703GC150   |
| 175        | 315        | 550       | 450       | 190       | 400        | 110            | -    | 703GC175   |
| 200        | 340        | 600       | 450       | 195       | 400        | 145            | -    | 703GC200   |

\*All information are indicative data. JONAS has the rights to make changes without prior notice.